
Performance Curve – S4MRC/S4MVX

RPM: 1750 DISCHARGE: 4" SOLIDS: 3"

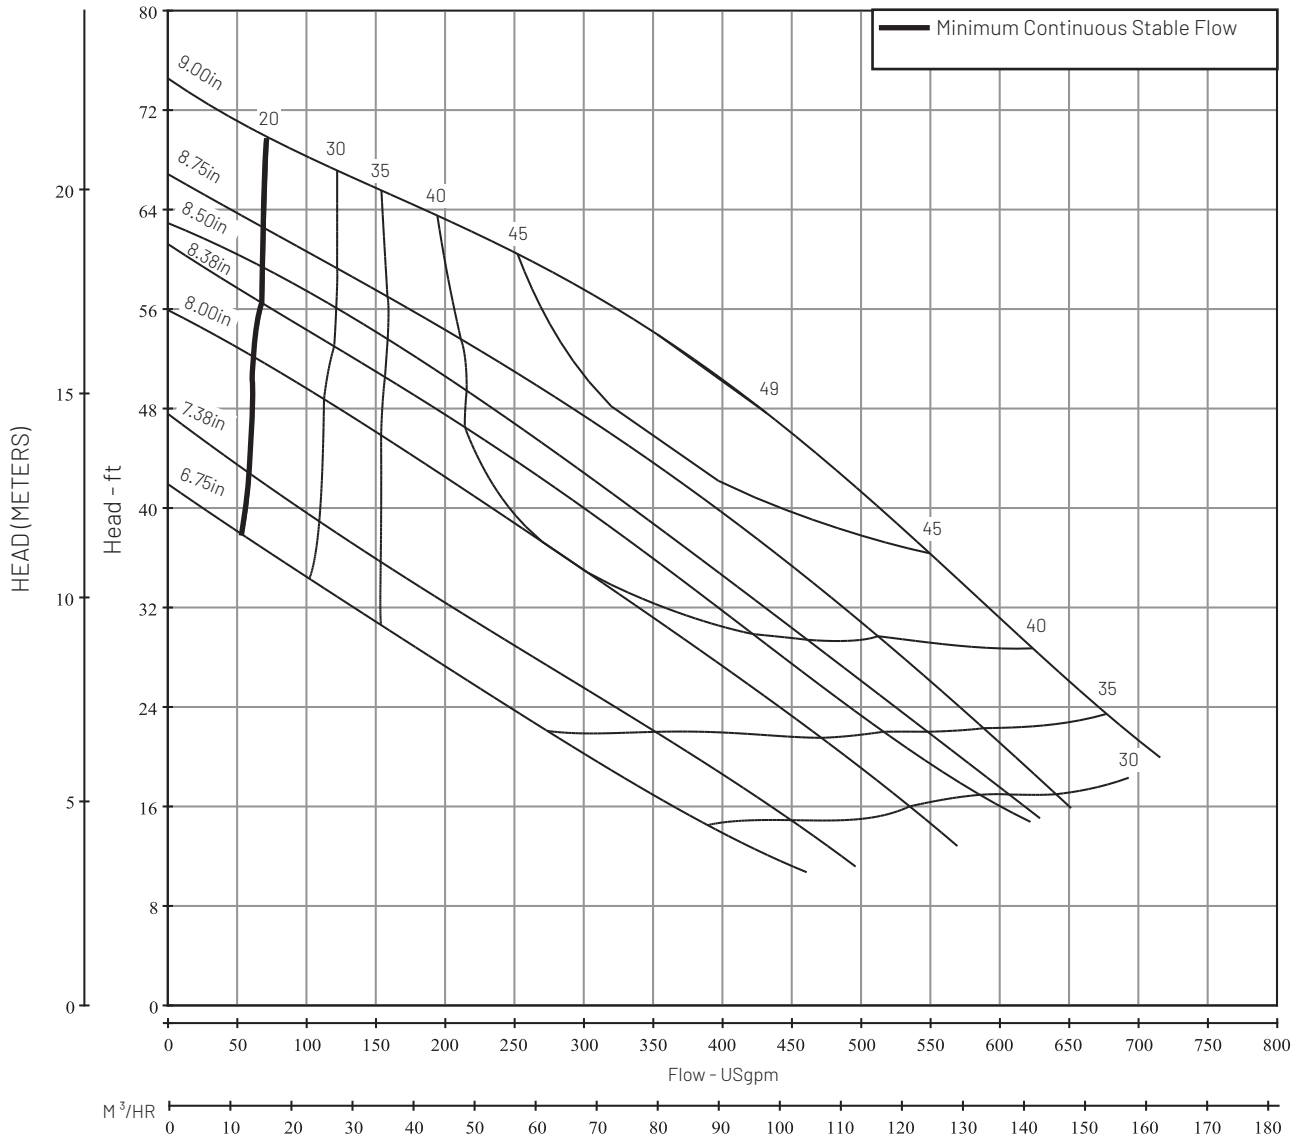

The curves reflect maximum performance characteristics without exceeding full load (Nameplate) horsepower. All pumps have a service factor of 1.2. Operation is recommended in the bounded area with operational point within the curve limit. Performance curves are based on actual tests with clear water at 70° F. and 1280 feet site elevation.

Conditions of Service:

GPM: _____ TDH: _____ _

January © 2020 Pentair plc

PENTAIR HYDROMATIC