PENTAIR AURORA

SINGLE AND MULTISTAGE SPLIT CASE FIRE PUMPS

MODELS: 481, 483, 485, 491, 492, AND 495

DIMENSION DATA GUIDE

pentair.com

©2021 Pentair. All Rights Reserved

AF-01-10-912-201-274 DT (8/15/2021)

TABLE OF CONTENTS

Model 481 Pumps Single Stage Fire Pumps 3

Model 483 Pumps Single Stage Fire Pumps 4

Model 485 Pumps Multistage Fire Pumps 5

Model 491 Pumps Single Stage Fire Pumps 6

Model 492 Pumps Single Stage Fire Pumps 7

Model 495 Pumps Multistage Fire Pumps 8

Model 481 Pumps On Standard Steel Base 9

Model 485 Pumps On Standard Steel Base 10

Model 491 Pumps On Standard Steel Base 11

Model 492 Pumps On Standard Steel Base 12

Model 495 Pumps On Standard Steel Base 13

Model 481 Pumps On Steel Drip Rim Base 14


Model 485 Pumps On Steel Drip Rim Base 15

Model 491 Pumps On Steel Drip Rim Base 16

Model 492 Pumps On Steel Drip Rim Base 17

Model 495 Pumps On Steel Drip Rim Base 18

MODEL 481 SINGLE STAGE FIRE PUMPS

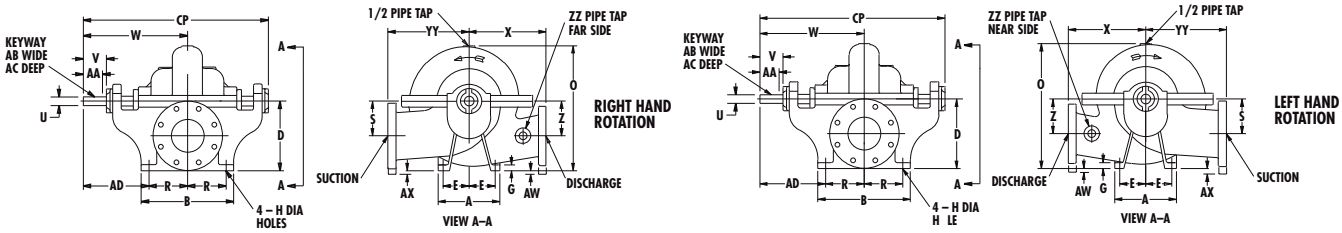

PUMP SIZE																										
DISCH	MODEL	CASE BORE	SUCTION	POWER SERIES	A	B	D	E	G	H	O	R	S	U	V	W	X	Z	AA	AB	AC	AD	AW	AX	CP	YY	ZZ
2-1/2	481	10B	3	2	8 (203)	10 (254)	8 (203)	3-1/2 (89)	3/4 (19)	5/8 (16)	16 (406)	4 (102)	4 (102)	1-1/8 (29)	2-7/8 (73)	13-1/2 (343)	9-3/4 (248)	4 (102)	2-1/8 (54)	1/4 (6)	1/8 (3)	9-1/2 (241)	– –	– –	24 (610)	10 (254)	
3	481	10	4	2	8 (203)	10 (254)	9 (229)	3-1/2 (89)	3/4 (19)	5/8 (16)	16-1/4 (413)	4 (102)	4-1/2 (114)	1-1/8 (29)	2-7/8 (73)	13-1/2 (343)	10 (254)	4-1/2 (114)	2-1/8 (54)	1/4 (6)	1/8 (3)	9-1/2 (241)	– –	1/2 (13)	24 (610)	11 (279)	
4	481	11 A/C	5	3	10 (254)	12 (305)	10 (254)	4-1/4 (108)	7/8 (22)	3/4 (19)	18-3/8 (467)	5 (127)	5 (127)	1-3/8 (35)	3 (76)	14-1/2 (368)	11-1/4 (286)	5 (127)	2-3/8 (60)	3/8 (10)	3/16 (5)	9-1/2 (241)	–	1/2 (13)	26 (660)	12-3/4 (324)	
4	481	11 D/E	5	3	10 (254)	12 (305)	10 (254)	4-1/4 (108)	7/8 (22)	3/4 (19)	18-3/8 (467)	5 (127)	5 (127)	1-3/8 (35)	3 (76)	14-1/2 (368)	12 (305)	5 (127)	2-3/8 (60)	3/8 (10)	3/16 (5)	9-1/2 (241)	–	1/2 (13)	26 (660)	12-3/4 (324)	
4	481	15	5	3	10 (254)	12 (305)	11 (279)	4-1/4 (108)	7/8 (22)	3/4 (19)	21-1/8 (537)	5 (127)	5-1/2 (140)	1-3/8 (35)	3 (76)	14-1/2 (368)	13 (330)	5-1/2 (140)	2-3/8 (60)	3/8 (10)	3/16 (5)	9-1/2 (241)	– –	– –	26 (660)	14 (356)	
5	481	11	6	4	10 (254)	12 (305)	11 (279)	4-1/4 (108)	7/8 (22)	3/4 (19)	19-3/4 (502)	5 (127)	5-1/2 (140)	1-1/2 (38)	3-1/2 (89)	16 (406)	11-1/4 (286)	5-1/2 (140)	2-7/8 (73)	3/8 (10)	3/16 (5)	11 (279)	– –	3/4 (19)	28-1/2 (724)	13-1/4 (337)	
5	481	15	6	4	10 (254)	12 (305)	12-1/2 (318)	4-1/4 (108)	7/8 (22)	3/4 (19)	22-1/2 (572)	5 (127)	6-1/4 (159)	1-1/2 (38)	3-1/2 (89)	16 (406)	13-1/4 (337)	6-1/4 (159)	2-7/8 (73)	3/8 (10)	3/16 (5)	11 (279)	– –	– –	28-1/2 (724)	15 (381)	1-1/4 (32)
5	481	17	6	4	10 (254)	12 (305)	12-1/2 (318)	4-1/4 (108)	7/8 (22)	3/4 (19)	22-1/2 (572)	5 (127)	6-1/4 (159)	1-1/2 (38)	3-1/2 (89)	16 (406)	14 (356)	6-1/4 (159)	2-7/8 (73)	3/8 (10)	3/16 (5)	11 (279)	– –	– –	28-1/2 (724)	15 (381)	
6	481	11	8	4	10 (254)	12 (305)	12-1/2 (318)	4-1/4 (108)	7/8 (22)	3/4 (19)	21-7/8 (556)	5 (127)	6-1/4 (159)	1-1/2 (38)	3-1/2 (89)	16 (406)	11-3/4 (298)	6-1/4 (159)	2-7/8 (73)	3/8 (10)	3/16 (5)	11 (279)	– –	1-1/4 (32)	28-1/2 (724)	14-1/2 (368)	
6	481	11HH	8	4A	12 (305)	14-1/2 (368)	16-1/2 (419)	5 (127)	1-1/4 (32)	7/8 (22)	25-3/4 (654)	6 (152)	8-5/8 (219)	1-1/2 (38)	3-3/8 (86)	18-1/8 (460)	10 (254)	8-5/8 (219)	2-7/8 (73)	3/8 (10)	3/16 (5)	12-1/8 (308)	–	–	32-7/8 (835)	15 (381)	
6	481	14HH	8	5A	12 (305)	14-1/2 (368)	16-1/2 (419)	5 (127)	1-1/4 (32)	7/8 (22)	27 (686)	6 (152)	7-1/2 (191)	1-3/4 (44)	4-1/8 (105)	20-1/2 (519)	15 (381)	7-1/2 (191)	2-7/8 (73)	3/8 (10)	3/16 (5)	14-1/2 (368)	–	–	36-3/4 (933)	17 (432)	
6	481	15	8	5	12 (305)	14 (356)	13-1/2 (343)	5 (127)	1 (25)	7/8 (22)	24--7/8 (632)	6 (152)	6-3/4 (171)	1-3/4 (44)	4 (102)	18 (457)	14-1/4 (362)	6-3/4 (171)	2-7/8 (73)	3/8 (10)	3/16 (5)	12 (305)	– –	3/4 (19)	32 (813)	16-3/4 425	
6	481	18	8	5	12 (305)	14 (356)	14-3/4 (375)	5 (127)	3/4 (19)	7/8 (22)	27-1/4 (692)	6 (152)	8 (203)	1-3/4 (44)	4 (102)	18 (457)	16 (406)	8 (203)	2-7/8 (73)	3/8 (10)	3/16 (5)	12 (305)	– –	3/4 (19)	32 (813)	18 (457)	
6	481	20	8	5	12 (305)	14 (356)	14-3/4 (375)	5 (127)	1 (25)	7/8 (22)	27-3/4 (705)	6 (152)	8 (203)	1-3/4 (44)	4 (102)	18 (457)	15-3/4 (400)	8 (203)	2-7/8 (73)	3/8 (10)	3/16 (5)	12 (305)	– –	3/4 (19)	32 (813)	18 (457)	
8	481	12	10	5	12 (305)	14 (356)	14-3/4 (375	5 (127)	1-1/4 (32)	7/8 (22)	26-3/8 (670)	6 (152)	8 (203)	1-3/4 (44)	4 (102)	18 (457)	17 (432)	9 (229)	2-7/8 (73)	3/8 (10)	3/16 (5)	12 (305)	1-3/4 (44)	2 (51)	32 (813)	17-3/4 (451)	
8	481	17	10	5	12 (305)	14 (356)	14-3/4 (375)	5 (127)	1-1/4 (32)	7/8 (22)	27-1/8 (689)	6 (152)	8 (203)	1-3/4 (44)	4 (102)	18 (457)	17 (432)	8 (203)	2-7/8 (73)	3/8 (10)	3/16 (5)	12 (305)	3/4 (19)	2 (51)	32 (813)	17-3/4 (451)	
8	481	21	10	6B	20 (508)	17 (432)	18-1/2 (470)	9 (229)	1 (25)	15/16 (24)	32-1/2 (826)	7-1/2 (191)	9-1/2 (241)	2-1/8 (54)	5-7/16 (138)	21-7/8 (556)	18 (457)	9-1/2 (241)	4-3/4 (121)	1/2 (13)	1/4 (6)	14-3/8 (365)	– –	– –	38 (965)	21 (533)	2 (51)
8	481	24	12	7	15 (381)	22 (559)	26 (660)	6-1/2 (165)	1-1/8 (29)	7/8 (22)	43-7/8 (1114)	10 (254)	15 (381)	2-1/2 (64)	6-5/8 (168)	25-1/4 (641)	20 (508)	15 (381)	5 (127)	5/8 (16)	5/16 (8)	15-1/4 (387)	– –	– –	43-7/8 (1114)	25 (635)	1-1/4 (32)
10	481	15	12	6B	15 (381)	22 (559)	25 (635)	6-1/2 (165)	1 (25)	7/8 (22)	38-1/2 (978)	10 (254)	13-1/2 (343)	2-1/8 (54)	5-7/16 (138)	21-7/8 (556)	17 (432)	13-1/2 (343)	4-3/4 (121)	1/2 (13)	1/4 (6)	11-7/8 (301)	– –	– –	38 (965)	20 (508)	1-1/4 (32)
10	481	18	12	6B	15 (381)	22 (559)	25 (635)	6-1/2 (165)	1 (25)	7/8 (22)	39-1/2 (1003)	10 (254)	13-1/2 (343)	2-1/8 (54)	5-7/16 (138)	21-7/8 (556)	18 (457)	13-1/2 (343)	4-3/4 (121)	1/2 (13)	1/4 (6)	11-7/8 (301)	– –	– –	38 (965)	22 (559)	
10	481	18D	12	7A	15 (381)	22 (559)	25 (635)	6-1/2 (165)	1-1/4 (32)	7/8 (22)	40-1/2 (1029)	10 (254)	12-1/4 (311)	2-1/8 (54)	5 (127)	24-1/4 (616)	20 (508)	12-1/4 (311)	6-5/8 (168)	1/2 (13)	1/4 (6)	14-1/4 (362)	– –	– –	43 (1092)	24 (610)	2 (51)
12	481	18	14	7	15 (381)	22 (559)	24 (610)	6-1/2 (165)	1 (25)	7/8 (22)	40-1/8 (1019)	10 (254)	15 (381)	2-1/2 (64)	6-5/8 (168)	25-1/4 (641)	18 (457)	15 (381)	5 (127)	5/8 (16)	5/16 (8)	15-1/4 (387)	– –	– –	43-7/8 (1114)	23 (584)	


NOTES


1. All dimensions are in inches (mm).
2. Dimensions may vary ± 3/8" (10).
3. Not for construction purposes unless certified.
4. Suction & discharge flanges ANSI Standard flat face.


STD. 125# SUCTION AND DISCHARGE FLANGES	OPT. 125# SUCTION FLANGE , 250# DISCHARGE FLANGE	OPT. 250# SUCTION AND DISCHARGE FLANGES

* Pump sizes 6-481-11HH & 6-481-14HH are furnished as standard with 125# suction flange and 250# discharge flange.

MODEL 483 SINGLE STAGE FIRE PUMPS

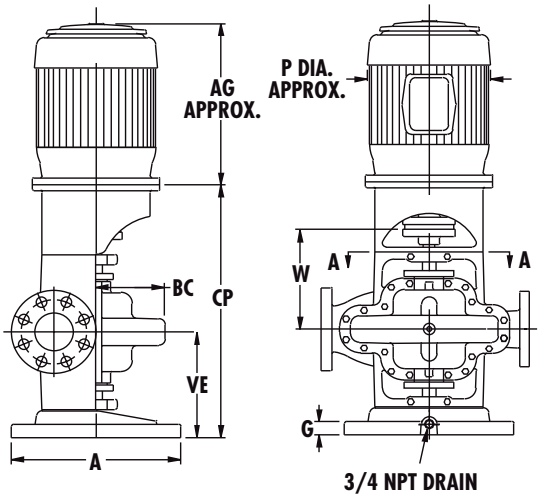

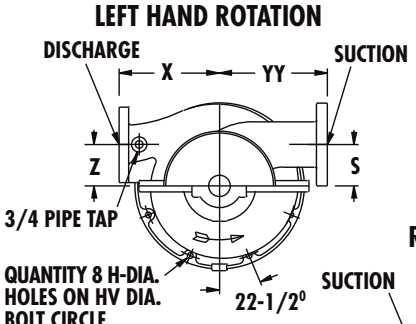

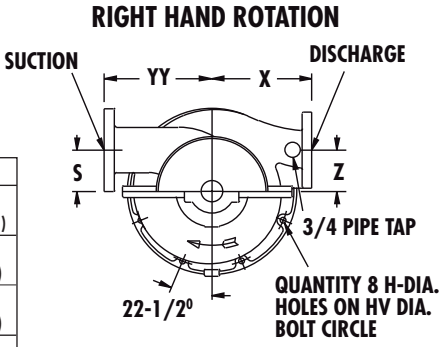

BASE	1	2	3
A	18 (457)	22 (559)	30 (762)
G	1-3/4 (44)	1-3/4 (44)	2 (51)
H	3/4 (19)	3/4 (19)	7/8 (22)
HW	16-1/4 (413)	20 (508)	28 (711)

STANDARD 125# SUCTION AND DISCHARGE FLANGES


OPTIONAL 125# SUCTION AND 250# DISCHARGE FLANGES

OPTIONAL 250# SUCTION AND 250# DISCHARGE FLANGES


PUMP SIZE			SUCTION	POWER SERIES	BASE	S	W	X	Z	BC	VE	YY	CP											
DISCH	MODEL	CASE BORE																						
MOTOR FRAME													213HP	215HP	254HP	256HP	284HP	286HP	324HP	326HP	364HP	365HP	404HP	405HP	444HP	445HP
													P	10	11	12	12	14	14	16	16	21	21	22	22	24	24
													AG	18	18	20	22	23	24	37	37	40	40	45	45	43	43
2-1/2	483	10	3	2	1	4 (102)	13-1/2 (343)	9-3/4 (248)	4 (102)	8 (203)	13 (330)	10 (254)	30	30	30	30	32	32	32	32	32	32				
3	483	10	4	2	1	4-1/2 (114)	13-1/2 (343)	10 (254)	4-1/2 (114)	7-3/16 (183)	13 (330)	11 (279)	30	30	30	30	32	32	32	32	32	32				
4	483 A/C	11	5	3	2	5 (127)	14-1/2 (368)	11-1/4 (286)	5 (127)	8-5/16 (211)	14 (356)	12-3/4 (324)				33	33	35	35	35	35	35	35	35	35	
4	483 D	11	5	3	2	5 (127)	14-1/2 (368)	12 (305)	5 (127)	8-5/16 (211)	14 (356)	12-3/4 (324)				33	33	35	35	35	35	35	35	35	35	
4	483	15	5	3	2	5-1/2 (140)	14-1/2 (368)	13 (330)	5-1/2 (140)	9 (229)	14 (356)	14 (356)					33	35	35	35	35	35	35	35	35	
5	483	11	6	4	2	5-1/2 (140)	16 (406)	11-1/4 (286)	5-1/2 (140)	8-3/4 (222)	15 (381)	13-1/4 (337)				35	35	37	37	37	37	37	37	37	37	
5	483	15	6	4	2	6-1/4 (159)	16 (406)	13-1/4 (337)	6-1/4 (159)	10-1/16 (256)	15 (381)	15 (381)						37	37	37	37	37	37	37	37	
5	483	17	6	4	2	6-1/4 (159)	16 (406)	14 (356)	6-1/4 (159)	10-1/16 (256	15 (381)	15 (381)							37	37	37	37	37	37	37	
6	483	11	8	4	2	6-1/4 (159)	16 (406)	11-3/4 (298)	6-1/4 (159)	9-1/4 (935)	15 (381)	14-1/2 (368)						35	37	37	37	37	37	37	37	37
6	483	15	8	5	3	6-3/4 (171)	18 (457)	14-1/4 (362)	6-3/4 (171)	11-5/16 (287)	17 (432)	16-3/4 (425)								41	41	41	41	41	41	41	41
6	483	18	8	5	3	8 (203)	18 (457)	16 (406)	8 (203)	12-1/2 (318)	17 (432)	18 (457)								41	41	41	41	41	41	41	41
6	483	20	8	5	3	8 (203)	18 (457)	15-3/4 (400)	8 (203)	12-15/16 (239)	17 (432)	18 (457)									41	41	41	41	41	41	41
8	483	12	10	5	3	8 (203)	18 (457)	17 (432)	9 (229)	11-9/16 (294)	17 (432)	17-3/4 (451)								41	41	41	41	41	41	41	41
8	483	17B	10	5	3	8 (203)	18 (457)	17 (432)	8 (203)	12-3/8 (314)	17 (432)	17-3/4 (451)											41	41	41	41	41

NOTES

1. All dimensions are in inches (mm).
2. Dimensions may vary ± 3/8" (10).
3. Not for construction purposes unless certified.
4. Suction and discharge flanges are ANSI standard flat face.
5. Motor dimensions "AG" and "P" will vary based on manufacturer and style of motor. Conduit box is shown in approximate location.

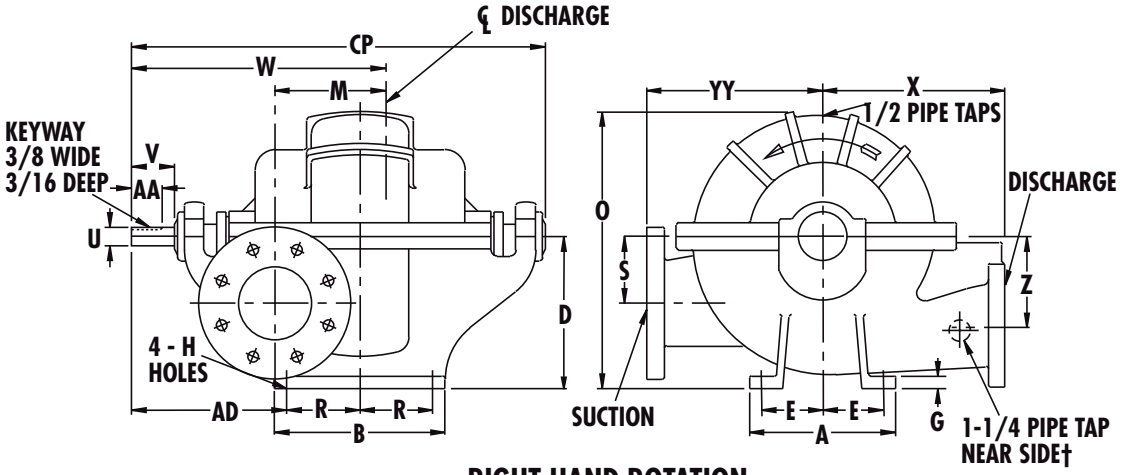

RIGHT HAND ROTATION

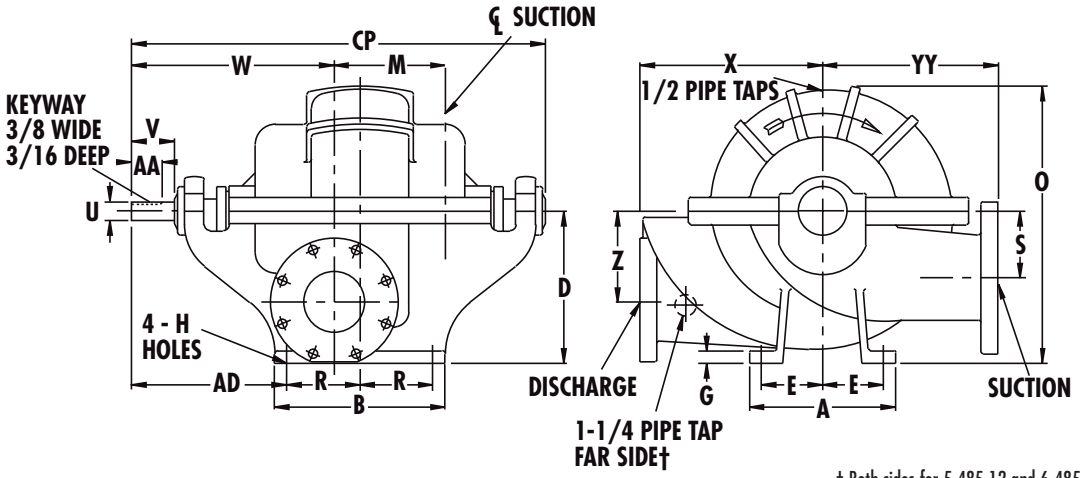

† Both sides for 5-485-12 and 6-485-12

LEFT HAND ROTATION


PUMP SIZE			SUCTION	POWER SERIES	A	B	D	E	G	H	M	O	R	S	U	V	RIGHT HAND ROTATION W	LEFT HAND ROTATION W	X	Z	AA	AD	CP	YY
DISCH	MODEL	CASE BORE																						
4	485	15	5	3	10 (254)	12 (304)	11 (279)	4-1/4 (108)	7/8 (22)	3/4 (19)	7-1/8 (181)	23 (584)	5 (127)	5 (127)	1-3/8 (35)	3 (76)	18-7/8 (479)	15-1/8 (384)	13 (330)	6-1/2 (165)	2 (51)	12 (304)	31 (787)	13-1/2 (343)
5	485	12	5	4A	15 (381)	16 (406)	14 (356)	6-1/2 (165)	1 (25)	7/8 (22)	6-5/8 (168)	24-1/4 (616)	7 (179)	7 (179)	1-1/2 (38)	3-5/8 (92)	20-7/8 (530)	18-1/8 (460)	13 (330)	7 (179)	2-1/2 (64)	12-1/2 (318)	35-3/8 (899)	13 (330)
5	485	15	6	4	12 (304)	14 (356)	12-1/2 (318)	5 (127)	1 (25)	7/8 (22)	9-1/8 (232)	24-1/2 (622)	6 (152)	5-1/2 (140)	1-1/2 (38)	3-1/2 (89)	21-1/8 (537)	16-7/8 (429)	15 (381)	7-1/2 (191)	2 (51)	13 (330)	34-1/2 (876)	15-7/16 (392)
6	485	12	6	5A	16 (406)	19 (483)	15 (381)	7 (179)	1 (25)	7/8 (22)	7-1/2 (191)	26-1/4 (667)	8-1/2 (216)	8 (203)	1-3/4 (44)	4 (102)	22-7/8 (581)	19-5/8 (498)	14 (356)	8 (203)	2-3/4 (70)	12-3/4 (324)	38-1/2 (078)	14 (356)
6	485	16/ 16B	8	5	12 (305)	14 (356)	16.50 (419)	5 (127)	1 (25)	.88 (22)	10.50 (267)	33.50 (851)	6 (152)	8.25 (210)	1.75 (44)	4 (102)	23.63 (600)	18.38 (467	19 (483)	7.75 (197)	2.88 (73)	15 (381)	37.88 (962)	17 (432)
6	485	17	8	5	12 (304)	14 (356)	14-3/4 (375)	5 (127)	1 (25)	7/8 (22)	11 (279)	28-1/4 (718)	6 (152)	7 (179)	1-3/4 (44)	4 (102)	24-1/2 (622)	17-1/2 (445)	16 (406)	9 (229)	2-7/8 (73)	15 (381)	38 (965)	16-1/2 (419)

NOTES
1. All dimensions are in inches (mm).
2. Dimensions may vary ± 3/8" (10).
3. Not for construction purposes unless certified.
4. Suction & discharge flanges ANSI Standard flat face.

STD. *125# SUCTION FLANGE , *250# DISCHARGE FLANGE	OPT. *250# SUCTION AND DISCHARGE FLANGES

* 150# AND 300# OR 300# AND 300# SUCTION AND DISCHARGE DUCTILE IRON FOR 5-485-12 AND 6-485-12

MODEL 491 SINGLE STAGE FIRE PUMPS

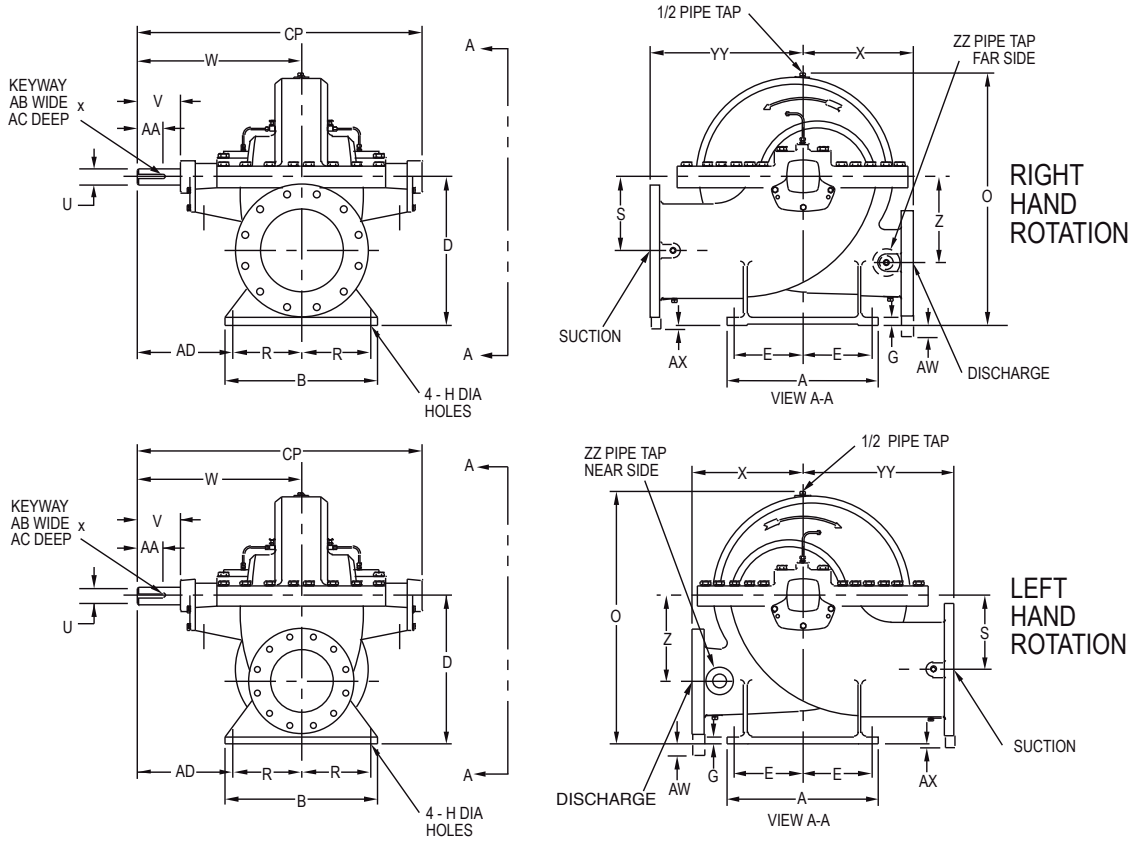

PUMP SIZE			SUCTION																						
DISCH	MODEL	CASE BORE		A	B	D	E	G	H	O	R	S	U	V	W	X	Z	AA	AB	AC	AD	AW	AX	CP	YY	ZZ
3	491	9A&C	5	14-1/2 (368)	14-1/2 (368)	12 (304)	6-1/4 (159)	1 (25)	7/8 (22)	18-7/8 (479)	6-1/4 (159)	6-1/8 (156)	1-1/8 (28)	3-5/16 (84)	14-5/8 (371)	11 (279)	6-1/8 (155)	2-1/2 (63)	1/4 (6)	1/8 (3)	8-3/8 (212)	- -	- -	25-15/16 (658)	12 (304)	
4	491	8A	6	11 (279)	11 (279)	9-3/4 (245)	4-5/8 (117)	3/4 (25)	5/8 (16)	16-1/8 (410)	4-5/8 (117)	5-3/4 (146)	1-1/8 (28)	3-1/4 (83)	14-5/8 (371)	10 (254)	5-1/2 (140)	2-1/2 (63)	1/4 (6)	1/8 (3)	10 (254)	3/4 (19)	2-1/4 (57)	25-15/16 (658)	11-1/4 (285)	
4	491	11A&C	6	14-1/2 (368)	14-1/2 (368)	13-3/4 (349)	6-1/4 (159)	1 (25)	7/8 (22)	22 (559)	6-1/4 (159)	6-7/8 (174)	1-1/2 (38)	3-1/2 (88)	16-5/8 (422)	11-1/4 (285)	7-1/8 (180)	2-3/8 (60)	3/8 (9)	3/16 (4)	10-3/8 (263)	- -	- -	29-11/16 (754)	14 (355)	3/4
4	491	14C	6	18 (457)	18 (457)	13-3/4 (349)	8 (203)	1-1/8 (28)	7/8 (22)	23-5/8 (600)	8 (203)	6-7/8 (174)	1-1/2 (38)	3-1/2 (88)	17-5/8 (447)	13 (330)	8-3/8 (212)	2-3/8 (60)	3/8 (9)	3/16 (4)	9-5/8 (244)	- -	- -	31-11/16 (804)	15-1/4 (387)	
5	491	14A	8	18 (457)	18 (457)	16-1/4 (412)	8 (203)	1-1/8 (28)	7/8 (22)	27-1/16 (687)	8 (203)	8-1/4 (209)	1-1/2 (38)	3-1/2 (88)	17-5/8 (447)	13-1/2 (342)	9-3/4 (247)	2-3/8 (60)	3/8 (9)	3/16 (4)	9-5/8 (244)	- -	- -	31-11/16 (804)	17-1/4 (438)	
5	491	18A	8	18 (457)	18 (457)	16-1/4 (412)	8 (203)	1-1/8 (28)	7/8 (22)	28-3/8 (720)	8 (203)	8-1/8 (206)	2-1/8 (53)	4-3/8 (111)	18-7/8 (479)	15 (381)	10-5/8 (268)	3-1/2 (88)	1/2 (12)	1/4 (6)	10-7/8 (276)	- -	- -	33-3/8 (847)	18-3/4 (476)	
6	491	12A	6	14-1/2 (368)	14-1/2 (368)	13-3/4 (349)	6-1/4 (159)	1 (25)	7/8 (22)	22 (559)	6-1/4 (159)	6-7/8 (174)	1-1/2 (38)	3-1/2 (88)	16-5/8 (422)	20-1/2 (520)	7-1/8 (180)	2-3/8 (60)	3/8 (9)	3/16 (4)	10-3/8 (263)	- -	- -	29-11/16 (754)	14 (355)	
6	491	14A&C	10	18 (457)	18 (457)	18-3/4 (476)	8 (203)	1-1/8 (28)	7/8 (22)	30-1/16 (763)	8 (203)	9-3/8 (238)	2-1/8 (53)	4-3/8 (111)	20-1/8 (511)	13-1/4 (337)	10 (254)	3-1/2 (88)	1/2 (12)	1/4 (6)	12-1/8 (308)	-	-	35-7/8 (911)	18 (457)	
6	491	18C	10	22 (558)	22 (558)	18-3/4 (476)	10 (254)	1-1/8 (28)	7/8 (22)	32 (813)	10 (254)	9-3/8 (238)	2-1/8 (53)	4-3/8 (111)	20-1/8 (511)	16 (406)	11-3/4 (295)	3-1/2 (88)	1/2 (12)	1/4 (6)	10-1/8 (263)	-	-	35-7/8 (911)	20 (508)	
6	491	19A	10	22 (558)	22 (558)	18-3/4 (476)	10 (254)	1-1/8 (28)	7/8 (22)	33-5/16 (846)	10 (254)	9-3/8 (238)	2-1/2 (63)	6 (152)	22-5/8 (574)	18 (457)	12-1/8 (307)	4 (101)	5/8 (15)	5/16 (7)	12-5/8 (320)	- -	- -	39-1/4 (996)	22 (558)	1
8	491	14A	12	22 (558)	22 (558)	21-1/2 (546)	10 (254)	1-1/8 (28)	7/8 (22)	33-5/8 (854)	10 (254)	10-3/4 (273)	2-1/8 (53)	4-3/8 (111)	20-1/2 (520)	16 (406)	10-3/4 (273)	3-1/2 (88)	1/2 (12)	1/4 (6)	10-1/2 (266)	- -	- -	36-5/8 (930)	22 (558)	
8	491	18A	12	22 (558)	22 (558)	21-1/2 (546)	10 (254)	1-1/8 (28)	7/8 (22)	36 (914)	10 (254)	10-3/4 (273)	2-1/2 (63)	6 (152)	23-3/4 (603)	16 (406)	12-1/2 (317)	4 (101)	5/8 (15)	5/16 (7)	13-3/4 (349)	- -	- -	41-1/2 (1054)	22 (558)	
10	491	20	16	22 (558)	22 (558)	24 (609)	10 (254)	1-1/4 (31)	7/8 (22)	40-3/8 (1025)	10 (254)	13 (330)	2-3/4 (69)	6-1/2 (165)	25-9/16 (649)	23 (584)	14-1/4 (361)	5 (127)	5/8 (15)	5/16 (7)	15-9/16 (395)	- -	1-3/4 (44)	44-9/16 (1131)	25 (635)	


NOTES

1. All dimensions are in inches.
2. Dimensions may vary ± 3/8".
3. Not for construction purposes unless certified.
4. Suction & discharge flanges ANSI Standard flat face.

*STD. 125# SUCTION FLANGE, 250# DISCHARGE FLANGE FOR 6-491-12A AND 10-491-20

STD. 125# SUCTION AND DISCHARGE FLANGES*	OPT. 125# SUCTION FLANGE , 250# DISCHARGE FLANGE	OPT. 250# SUCTION AND DISCHARGE FLANGES

MODEL 492 SINGLE STAGE FIRE PUMPS

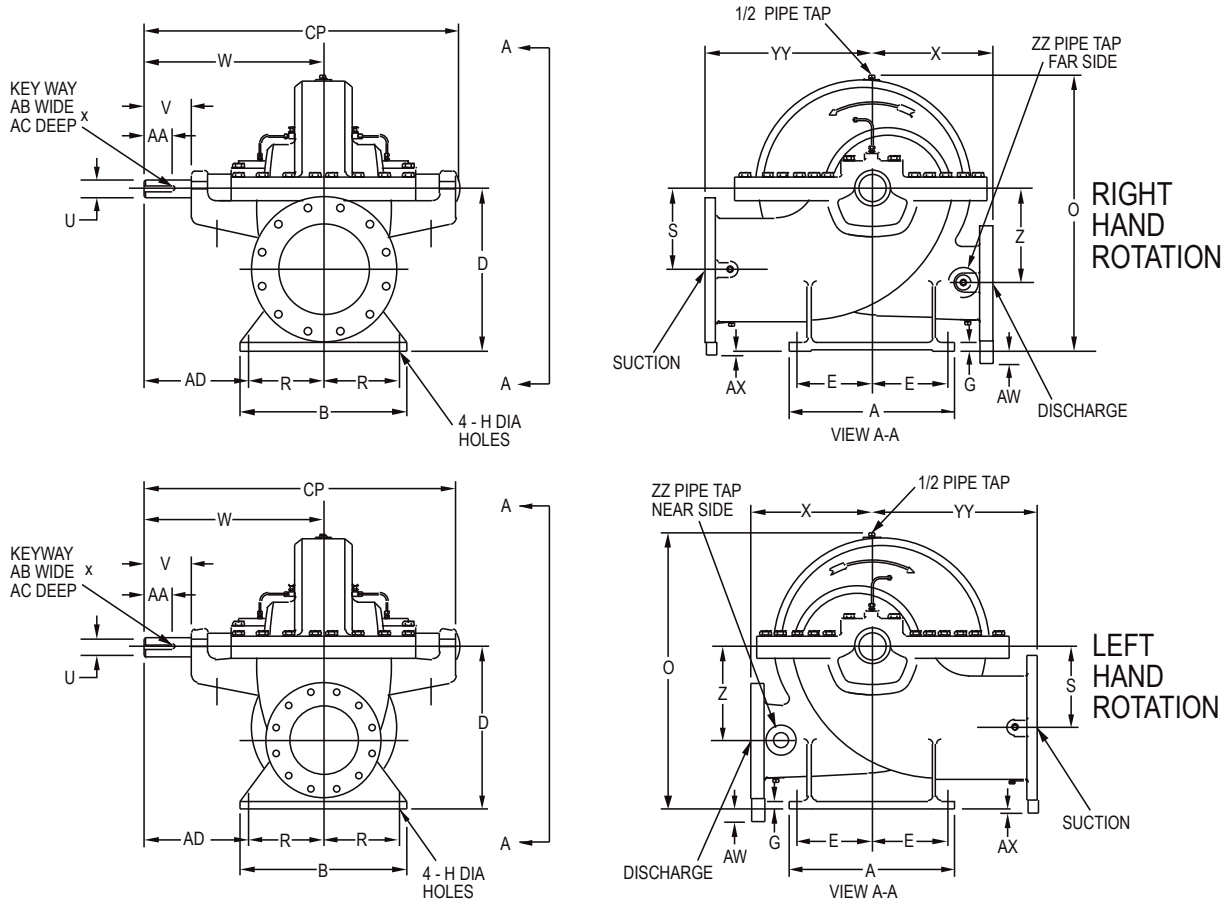


PUMP SIZE			SUCTION																							
DISCH	MODEL	CASE BORE		A	B	D	E	G	H	O	R	S	U	V	W	X	Z	AA	AB	AC	AD	AW	AX	CP	YY	ZZ
3	492	10A	4	12 (305)	11-1/2 292)	10-1/2 (267)	5-1/8 (130)	2 (50)	5/8 (16)	17 (432)	4-7/8 (124)	5-1/2 (140)	1-1/16 (27)	3-7/8 (98)	16-1/2 (419)	10 (254)	5-1/2 (140)	3-3/8 (86)	1/4 (6)	1/8 (3)	11-5/8 (295)	-	-	29-3/16 (741)	10 (254)	1
4	492	10	6	13 (330)	14 (355)	13 (330)	5-1/2 (139)	1 (25)	7/8 (22)	20-5/16 (515)	6 (152)	6-1/2 (165)	1-1/4 (31)	4 (101)	16-7/8 (428)	10-1/4 (260)	6-1/2 (165)	2-1/4 (57)	1/4 (6)	1/8 (3)	10-7/8 (276)	- -	- -	29-13/16 (757)	11 (279)	
4	492	14	5	14 (355)	15 (381)	12-1/2 (317)	6 (152)	2 (50)	7/8 (22)	21-3/4 (552)	6-1/2 (165)	7-3/8 (187)	1-1/4 (31)	3-5/8 (92)	18-3/8 (466)	13-1/2 (342)	7-3/8 (187)	2-5/8 (66)	1/4 (6)	1/8 (3)	11-7/8 (301)	-	3/8 (9)	33-3/16 (842)	14 (355)	3/4
4	492	18	5	15 (381)	16 (406)	14-3/4 (374)	6-1/2 (165)	2 (50)	7/8 (22)	25-3/4 (654)	7 (177)	9-1/2 (241)	1-1/4 (31)	3-1/2 (88)	18-3/8 (466)	14 (355)	9-1/2 (241)	2-5/8 (66)	1/4 (6)	1/8 (3)	11-3/8 (288)	- -	1/4 (6)	33-1/4 (844)	14 (355)	
5	492	10	8	16-1/2 (419)	16-1/2 (419)	16 (406)	7 (177)	1 (25)	1-1/4 (31)	23-5/8 (600)	7 (177)	8 (203)	1-5/8 (41)	4-5/8 (117)	20 (508)	12-1/2 (317)	7 (177)	4-3/16 (106)	3/8 (9)	3/16 (4)	13 (406)	-	-	35-1/2 (902)	13 (330)	
5	492	18	6	18 (457)	16 (406)	16 (406)	8 (203)	2-1/4 (57)	1 (25)	27-3/4 (704)	7 (177)	10 (254)	1-11/16 (42)	4-15/16 (125)	21 (533)	14 (355)	10 (254)	4-1/8 (104)	3/8 (9)	3/16 (4)	14 (355)	- -	1/4 (6)	37-1/8 (942)	14 (355)	
6	492	10	10	16-1/2 (419)	16-1/2 (419)	18 (457)	7 (177)	3/4 (19)	1-1/4 (31)	26-7/16 (671)	7 (177)	9 (228)	1-5/8 (41)	4-5/8 (117)	20-5/8 (523)	13 (330)	7-1/2 (190)	4-3/16 (106)	3/8 (9)	3/16 (4)	13-5/8 (346)	- -	- -	36-3/4 (933)	15 (381)	
6	492	15	8	17-1/2 (444)	20 (508)	15-1/2 (394)	7-3/4 (197)	2-1/2 (63)	1 (25)	25-3/4 (654)	9 (228)	8-3/4 (222)	1-11/16 (42)	4-3/16 (106)	22-1/2 (571)	15.5 (394)	8-3/4 (222)	4-1/8 (104)	3/8 (9)	3/16 (4)	13-5/8 (346)	-	3/4 (19)	40-1/4 (1022)	15 (381)	1
8	492	15	10	17-1/2 (444)	20 (508)	17-1/2 (444)	7-3/4 (196)	2-1/2 (63)	1 (25)	28-1/8 (714)	9 (228)	9-1/4 (234)	1-11/16 (42)	4-13/16 (122)	22-1/2 (571)	17 (431)	9-1/4 (234)	4-1/8 (104)	3/8 (9)	3/16 (4)	13-1/2 (342)	- -	1/2 (12)	40-1/4 (1022)	17 (431)	
10	492	18	12	26 (660)	24 (609)	21-3/4 (552)	10-1/2 (266)	1-1/4 (31)	1-1/4 (31)	35-1/4 (895)	9-1/2 (241)	11-1/2 (292)	2 (50)	5-5/16 (134)	25-9/16 (649)	21 (533)	11-1/2 (292)	5 (127)	1/2 (12)	1/4 (6)	16-1/16 (407)	- -	- -	45-13/16 (1163)	21 (533)	

NOTES


1. All dimensions are in inches.
2. Dimensions may vary ± 3/8".
3. Not for construction purposes unless certified.
4. Suction & discharge flanges ANSI Standard flat face.

STD. 125# SUCTION AND DISCHARGE FLANGES	OPT. 125# SUCTION FLANGE , 250# DISCHARGE FLANGE	OPT. 250# SUCTION AND DISCHARGE FLANGES

MODEL 495 MULTISTAGE FIRE PUMPS

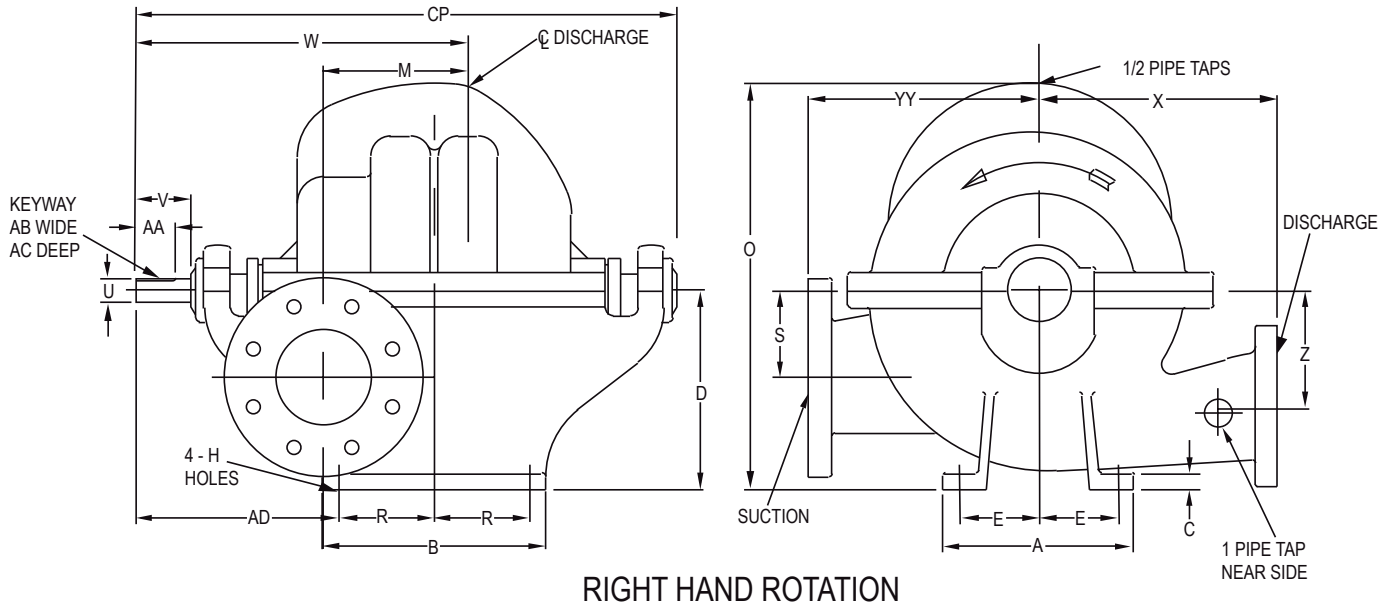

RIGHT HAND ROTATION

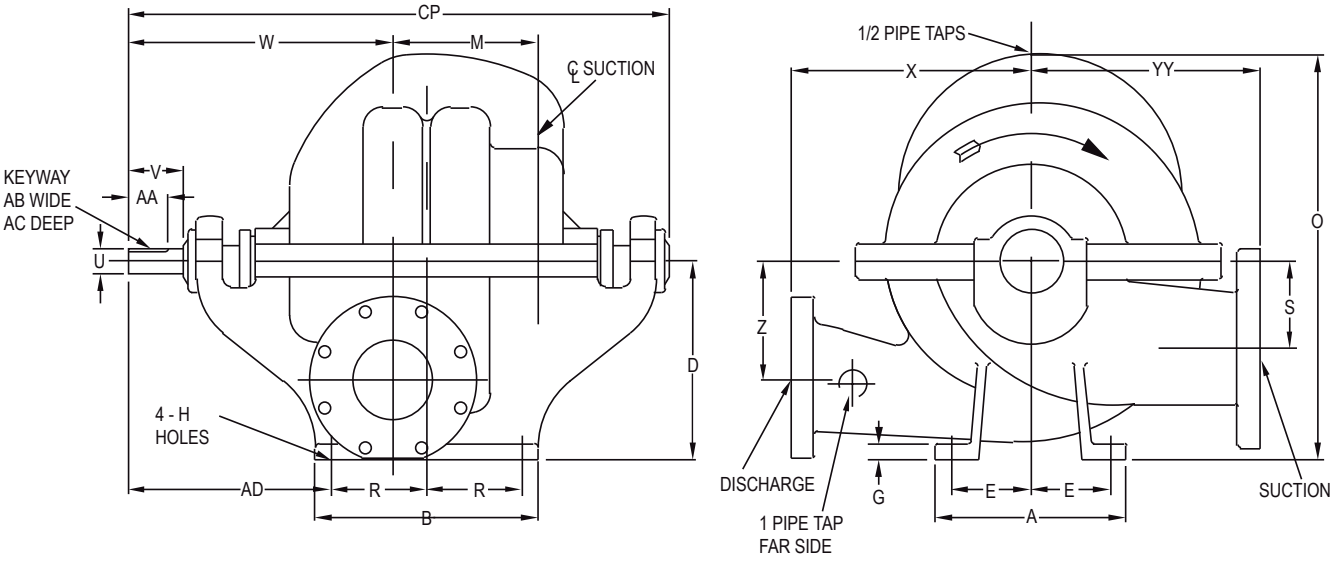


LEFT HAND ROTATION

PUMP SIZE			SUCTION													RIGHT HAND ROTATION	LEFT HAND ROTATION								
DISCH	MODEL	CASE BORE		A	B	D	E	G	H	M	O	R	S	U	V	W	W	X	Z	AA	AB	AC	AD	CP	YY
5	495	15	6	20 (508)	24 (609)	17 (431)	9 (228)	2 (50)	7/8 (22)	11 (279)	27-3/4 (704)	11 (279)	9 (228)	1-11/16 (42)	5-7/16 (138)	28-3/8 (720)	23-3/8 (593)	15 (381)	9 (228)	4 (101)	3/8 (9)	3/16 (4)	14-7/8 (377)	46-7/8 (1190)	15 (381)
6	495	17	8	22 (558)	27 (685)	17-1/2 (444)	9-3/4 (247)	2-1/2 (63)	1-1/8 (28)	13 (330)	35-3/8 (898)	12 (304)	9 (228)	2-1/4 (57)	4-5/8 (117)	31-5/8 (803)	25-1/8 (638)	16-1/2 (419)	10-1/2 (266)	4-1/4 (107)	1/2 (12)	1/4 (6)	16-3/8 (415)	52-1/2 (1333)	16-1/2 (419)

NOTES
1. All dimensions are in inches.
2. Dimensions may vary ± 3/8".
3. Not for construction purposes unless certified.
4. Suction & discharge flanges ANSI Standard flat face.

STD. 125# SUCTION FLANGE , 250# DISCHARGE FLANGE	OPT. 250# SUCTION AND DISCHARGE FLANGES

MODEL 481 ON STANDARD STEEL BASE

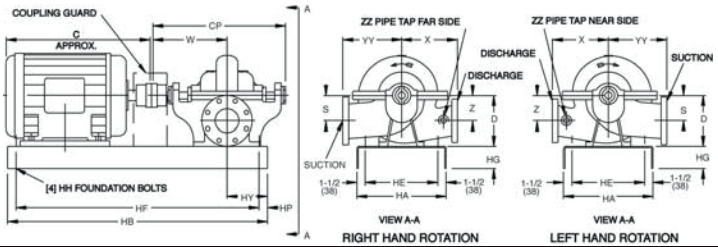

STANDARD 125# SUCTION AND DISCHARGE FLANGES	OPTIONAL 125# SUCTION FLANGE, 250# DISCHARGE FLANGE	OPTIONAL 250# SUCTION AND DISCHARGE FLANGES


PUMP SIZE			SUCTION	POWER SERIES	D	S	W	X	Z	CP	HY	YY	ZZ	MOTOR FRAME	215T	254T	256T	284TS	284T	286TS	286T	324TS	324T	326TS	326T	364TS	364T	365TS	365T	404TS	404T	405TS	405T	444TS	444T	445TS	445T	447TS	447T	449TS	449T
DISCH	MODEL	CASE BORE												C APPROX	18 (457)	21 (533)	23 (584)	22 (558)	24 (609)	24 (609)	25 (635)	25 (635)	26 (660)	26 (660)	28 (711)	29 (736)	29 (736)	28 (711)	30 (761)	30 (761)	33 (838)	32 (812)	35 (888)	34 (863)	38 (964)	36 (914)	40 (1015)	40 (1015)	44 (1117)	45 (1143)	49 (1245)
2-1/2	481	10B	3	2	8 (203)	4 (102)	13-1/2 (343)	9-3/4 (247)	4 (102)	20 (609)	5 (127)	10 (254)	1-1/4	BASE	5	7	7	9	9	9	9	11	11	11	11	11	11	11	12	-	-	-	-	-	-	-	-				
3	481	10	4		9* (228)	4-1/2 (114)	13-1/2 (343)	10 (254)	4-1/2 (114)	24 (609)	5 (127)	11 (279)		BASE	5	7	7	9	9	9	9	11	11	11	11	11	11	11	12	-	-	-	-	-	-	-	-				
4	481	11A 11C	5	3	10+ (254)	5 (127)	14-1/2 (368)	11-1/4 (286)	5 (127)	26 (660)	6 (152)	12-3/4 (324)		BASE	7	7	9	11	11	11	11	11	11	11	11	12	12	12	15	15	15	15	15	15	-				
4	481	11D/E	5		10+ (254)	5 (127)	14-1/2 (368)	12 (305)	5 (124)	26 (660)	6 (152)	12-3/4 (324)		BASE	7	7	9	11	11	11	11	11	11	11	11	12	12	12	15	15	15	-	-	-	-				
4	481	15	5		11 (279)	5-1/2 (140)	14-1/2 (368)	13 (330)	5-1/2 (140)	26 (660)	6 (152)	14 (355)		BASE	-	7	9	11	11	11	11	11	11	11	11	12	12	12	15	15	15	15	-	-	-	-				
5	481	11B 11C	6	4	11** (279)	5-1/2 (140)	16 (406)	11-1/4 (286)	5-1/2 (140)	28-1/2 (723)	6 (152)	13-1/4 (336)		BASE	7	9	10	11	11	11	11	12	12	12	12	12	12	12	15	15	15	15	15	16	15	16				
5	481	15 15A/B	6		12-1/2 (217)	6-1/4 (159)	16 (406)	13-1/4 (336)	6-1/4 (159)	26-1/2 (673)	6 (152)	15 (381)		BASE	7	9	10	11	11	11	11	12	12	12	12	12	12	12	15	15	15	15	15	16	15	16	16	16	16	16
5	481	17	6		12-1/2 (217)	6-1/4 (159)	16 (406)	14 (355)	6-1/4 (159)	28-1/2 (723)	6 (152)	15 (381)		BASE	7	9	10	11	11	11	11	12	12	12	12	12	12	12	15	15	15	15	15	16	15	16				
6	481	11	8		12-1/2 (217)	6-1/4 (159)	16 (406)	11-3/4 (298)	6-1/4 (159)	28-1/2 (723)	6 (152)	14-1/2 (368)		BASE	7	9	10	11	11	11	11	12	12	12	12	12	12	12	15	15	15	15	15	16	15	16				
6	481	11HH	8	4A	16-1/2 (419)	8-5/8 (219)	18-1/2 (460)	10 (254)	8-5/8 (219)	32-7/8 (835)	8 (203)	15 (381)		BASE														13	13	15	15	15	15	16	16	16	16	16	16	17
6	481	14HH 14HHB	8	5A	16-1/2 (419)	7-1/2 (191)	20-1/2 (519)	15 (381)	7-1/2 (191)	36-3/4 (933)	8 (203)	17 (431)		BASE														13	13	15	16	16	16	16	16	16	16	16	17	17	17
6	481	15B 15C/E	8	5	13-1/2 (343)	6-3/4 (171)	18 (457)	14-1/4 (368)	6-3/4 (171)	32 (812)	7 (178)	16-3/4 (425)		BASE		-	11	12	12	12	12	12	12	12	12	12	12	13	13	15	15	15	16	16	16	16				
6	481	18B 18C/D	8		14-3/4 (374)	8 (203	18 (457)	16 (406)	8 (203)	32 (812)	7 (178)	18 (457)		BASE		10	11	12	12	12	12	12	12	12	12	12	12	13	13	15	15	15	16	16	16	16				
6	481	20	8		14-3/4 (374)	8 (203)	18 (457)	15-3/4 (400)	8 (203)	32 (812)	7 (178)	18 (457)		BASE		10	11	12	12	12	12	12	12	12	12	12	12	13	13	15	15	15	16	16	16	16				
8	481	12	10		14-3/4 (374)	8 (203)	18 (457)	17 (431)	9 (228)	32 (812)	7 (178)	17-3/4 (450)		BASE		10	11	12	12	12	12	12	12	12	12	12	12	13	13	15	15	15	16	16	16	16				
8	481	17B	10		14-3/4 (374)	8 (203)	18 (457)	17 (431)	8 (203)	32 (812)	7 (178)	17-3/4 (450)		BASE		10	11	12	12	12	12	12	12	12	12	12	12	13	13	15	15	15	16	16	16	16				
8	481	21 21A	10	6B	18-1/2 (470)	9-1/2 (241)	21-7/8 (555)	18 (457)	9-1/2 (241)	38 (964)	11 (279)	21 (533)	2	BASE														14	14	16	16	16	16	16	16	17	17			
8	481	24	12	7	26 (660)	15 (381)	25-1/4 (641)	20 (508)	15 (381)	43-7/8 (1114)	11 (279)	25 (635)	1-1/4	BASE																							17	17	17	17
10	481	15C	12	6B	25 (635)	13-1/2 (343)	21-7/8 (555)	17 (431)	13-1/2 (343)	38 (964)	11 (279)	20 (508)		BASE												14	14	14	14	16	16	16	16	16	16	17				
10	481	18	12		25 (635)	13-1/2 (343)	21-7/8 (555)	18 (457)	13-1/2 (343)	38 (964)	11 (279)	22 (558)	2	BASE														14	14	16	16	16	16	16	16	17				
10	481	18D	12	7A	25 (635)	12-1/4 (311)	24-1/4 (616)	20 (508)	12-1/4 (311)	43 (1092)	11-1/2 (292)	24 (610)		BASE																				16		16		17			
12	481	18A	14	7	24 (609)	15 (381	25-1/4 (615)	18 (457)	15 (381)	44 (1117)	11 (279)	23 (584)		BASE																	16	16	16	16	17	17	17				

NOTES
1. All dimensions are in inches.
2. Dimensions may vary ± 3/8".
3. Not for construction purposes unless certified.
4. Coupling gap may vary 1/8" thru 2-1/16".
5. Conduit box is shown in approximate location. Dimensions are not specifed as they vary with each motor manufacturer.
6. Suction and discharge flanges are ANSI standard flat face.

* D is 10-1/2" when using frames 324TS - 365TS.
** D is 12 when using frames 404TS - 445TS.
*** Pump sizes 6-481-11HH & 6-481-14HH are furnished as standard with 125# suction flange & 250# discharge flange.
+D is 10-1/2" when using frames 404TS - 405T and D is 11 when using frames 444TS - 445TS.


BASE	HA	HB	HE	HG	HH	HF	HP
5	12 (305)	38 (964)	9 (228)	3 (76)	1/2 (13)	17 (431)	20 (508)
7	13 (330)	42 (1066)	10 (254)	4 (101)	5/8 (15)	17 (431)	24 (609)
9	15 (381)	44 (1117)	12 (305)	3-3/8 (86)	5/8 (15)	19 (482)	24 (609)
10	18 (457)	44 (1117)	15 (381)	4 (101)	5/8 (15)	42 (1066)	1 (25)
11	18 (457)	48 (1219)	15 (381)	4 (101)	5/8 (15)	46 (1168)	1 (25)
12	18 (457)	54 (1371)	15 (381)	4 (101)	5/8 (15)	52 (1320)	1 (25)
13	18 (457)	60 (1524)	15 (381)	4 (101)	5/8 (15)	35 (888)	24 (609)
14	18 (457)	65 (1651)	15 (381)	4 (101)	5/8 (15)	40 (1015)	24 (609)
15	22 (558)	60 (1524)	19 (482)	4 (101)	5/8 (15)	58 (1473)	1 (25)
16	22 (558)	72 (1828)	19 (482)	4 (101)	5/8 (15)	70 (1778)	1 (25)
17	22 (558)	84 (2133)	19 (482)	4 (101)	5/8 (15)	82 (2082)	1 (25)

MODEL 485 ON STANDARD STEEL BASE

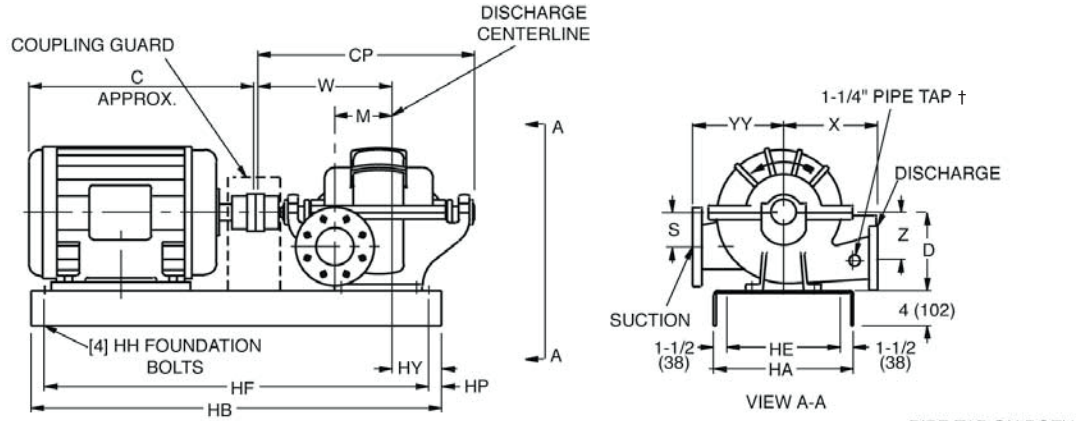

RIGHT HAND ROTATION

† PIPE TAP ON BOTH SIDES OF 5-485-12 AND 6-485-12. PIPE TAP ON NEAR SIDE OF OTHER PUMPS.

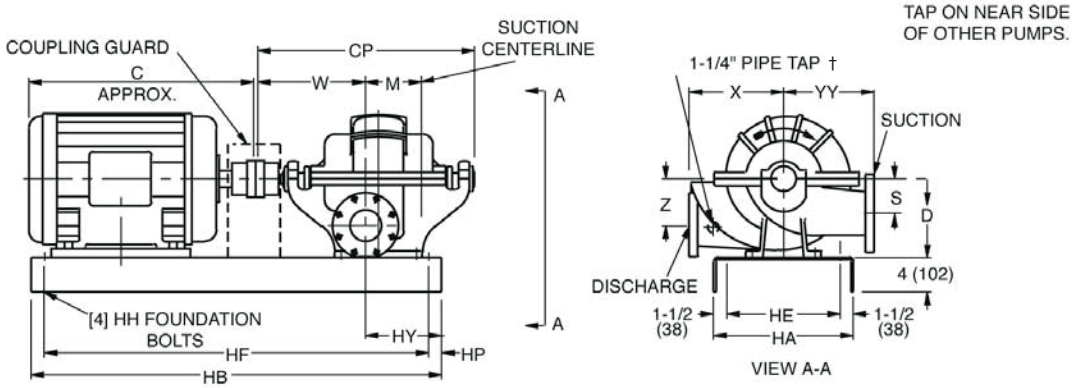

LEFT HAND ROTATION

☐ STANDARD* 125# SUCTION AND 250# DISCHARGE FLANGE ☐ OPTIONAL* 250# SUCTION AND DISCHARGE FLANGES

PUMP SIZE		CASE BORE	SUCTION	POWER SERIES	D	M	S	RIGHT HAND ROTATION W	LEFT HAND ROTATION W	X	Z	CP	RIGHT HAND ROTATION HY	LEFT HAND ROTATION HY	YY	MOTOR FRAME	326TS	326T	364TS	364T	365TS	365T	404TS	404T	405TS	405T	444TS	445TS	447TS	449TS
DISCH	MODEL															C	26 (660)	27 (711)	28 (685)	30 (736)	33 (711)	32 (761)	36 (761)	34 (838)	36 (812)	39 (914)	45 (863)	(914)	(991)	(1143)
4	485	15	5	3	11 (279)	7-1/8 (181)	5 (127)	18-7/8 (479)	15-1/8 (384)	13 (330)	6-1/2 (165)	31 (787)	4-1/8 (105)	7-7/8 (200)	13-1/2 (343)	BASE	12	12	12	12	12	12	15	15	15	15	15			
5	485	12	5	4A	14 (356)	6-5/8 (168)	7 (178)	20-7/8 (530)	18-1/8 (460)	13 (330)	7 (178)	35-3/8 (889)	11-1/8 (283)	13-7/8 (352)	13 (330)	BASE							16		16		16	16	17	17
5	485	15	6	4	12-1/2 (317)	9-1/8 (232)	5-1/2 (140)	21-1/8 (536)	16-7/8 (428)	15 (381)	7-1/2 (190)	34-1/2 (876)	4-7/8 (124)	9-1/8 (232)	15-7/16 (392)	BASE	12	12	12	12	12	13	15	15	15	15	15	16		
6	485	12	6	5A	15 (381)	7-1/2 (191)	8 (203)	22-7/8 (581)	19-5/8 (498)	14 (356)	8 (203)	38-1/2 (978)	10-7/8 (276)	14-1/8 (359)	14 (356)	BASE									16		16	16	17	17
6	485	16/ 16B	8	5	16.5 (419)	10.5 (267)	8.25 (210)	23.63 (600)	18.38 (467)	19 (483)	7.75 (197)	37.88 (962)	5 (127)	10.25 (260)	17 (432)	BASE					13	13	16	16	16	16	16	16	16	17
6	485	17A	8	5	14-3/4 (374)	11 (279)	7 (178)	24-1/2 (622)	17-1/2 (444)	16 (406)	9 (228)	38 (964)	3-1/2 (89)	10-1/2 (266)	16-1/2 (419)	BASE	13	13	13	13	13	13	15	15	15	16	16	16		


BASE	SIZE	HA	HB	HE	HF	HH	HP
12	18x54 (558)	18 (457)	54 (1372)	15 (381)	52 (1321)	5/8 (16)	1 (25)
13	18x60 (660)	18 (457)	60 (1524)	15 (381)	35 (889)	5/8 (16)	24 (609)
15	22x60 (660)	22 (559)	60 (1524)	19 (483)	58 (1473)	3/4 (19)	1 (25)
16	22x72 (660)	22 (559)	72 (1829)	19 (483)	70 (1777)	5/8 (16)	1 (25)
17	22x84 (660)	22 (559)	84 (2134)	19 (483)	80 (2083)	5/8 (16)	1 (25)

NOTES

1. All dimensions are in inches (mm).
2. Dimensions may vary ± 3/8" (10).
3. Not for construction purposes unless certified.
4. Coupling gap may vary 1/8" thru 1".
5. Conduit box is shown in approximate location. Dimensions are not specifed as they vary with each motor manufacturer.
6. Suction and discharge flanges are ANSI standard flat face.

* 150# AND 300# OR 300# AND 300# SUCTION AND DISCHARGE DUCTILE IRON FOR 5-485-12 AND 6-485-12

MODEL 491 ON STANDARD STEEL BASE

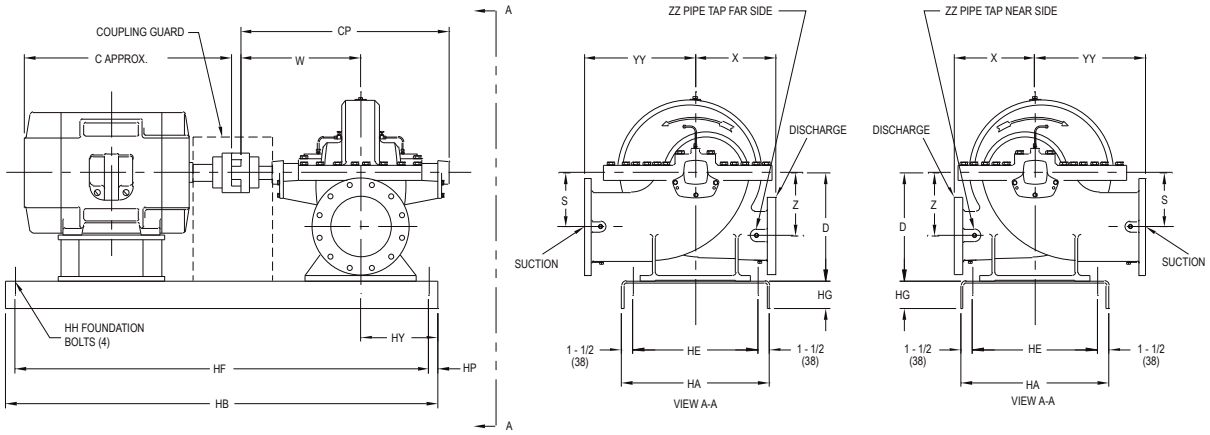


RIGHT HAND ROTATION


LEFT HAND ROTATION


| STANDARD* 125# SUCTION AND DISCHARGE FLANGES | | | | | | | | | | | | | OPTIONAL 125# SUCTION FLANGE, 250# DISCHARGE FLANGE | | | | | | | | | | | | | | | | | | | | | | | | | OPTIONAL 250# SUCTION AND DISCHARGE FLANGES | | | | | | | | | | | | | MOTOR FRAME | 254T | 256T | 284TS | 284T | 286TS | 286T | 324TS | 324T | 326TS | 326T | 364TS | 364T | 365TS | 365T | 404TS | 404T | 405TS | 405T | 444TS | 444T | 445TS | 445T | 447TS | 447T | 449TS | 449T |
|---|---|---

MODEL 492 ON STANDARD STEEL BASE

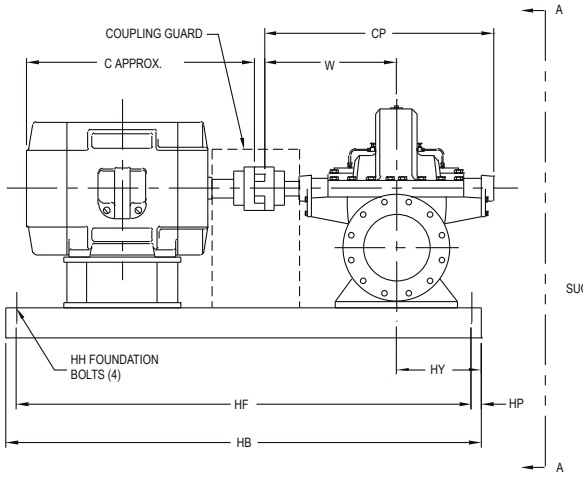

RIGHT HAND ROTATION

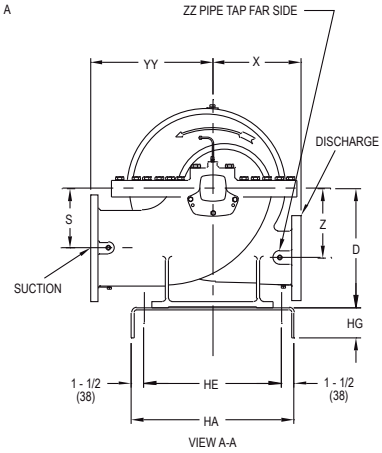

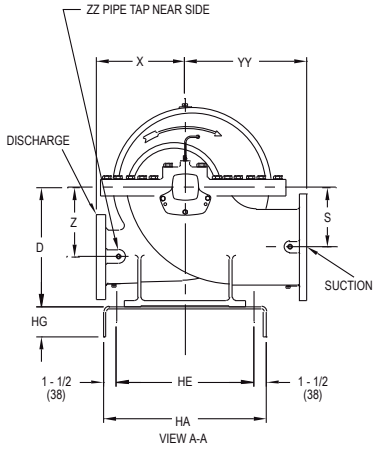

LEFT HAND ROTATION


STANDARD 125# SUCTION AND DISCHARGE FLANGES	OPTIONAL 125# SUCTION FLANGE, 250# DISCHARGE FLANGE	OPTIONAL 250# SUCTION AND DISCHARGE FLANGES	MOTOR FRAME	254T	256T	284TS	284T	286TS	286T	324TS	324T	326TS	326T	364TS	364T	365TS	365T	404TS	404T	405TS	405T	444TS	444T	445TS	445T	447TS	447T	449TS	449T
PUMP SIZE				21	23	22	24	24	25	25	26	26	28	29	29	28	30	30	33	32	35	34	38	36	40	40	44	45	49
DISCH	MODEL	CASE BORE	SUCTION	D	S	W	X	Z	CP	HY	YY	ZZ	C APPROX	(533)	(584)	(558)	(609)	(609)	(635)	(635)	(660)	(660)	(711)	(736)	(736)	(711)	(762)	(762)	(838)	(812)	(889)	(863)	(965)	(914)	(1016)	(1016)	(1117)	(1143)	(1244)
3	492	10A	4	10-1/2 (267)	5-1/2 (140)	16-1/2 (419)	10 (254)	5-1/2 (140)	29-3/16 (757)	7 (178)	10 (254)	1	BASE	11	11	11	11	11	11	12	12	12	12	12	12	12	12	-	-	-	-	-	-	-	-	-	-
4	492	10	6	13 (330)	6-1/2 (165)	16-7/8 (428)	10-1/4 (260)	6-1/2 (165)	29-13/16 (757)	10 (254)	11 (279)	3/4	BASE	-	-	-	-	-	-	13A	13A	13A	13A	13A	13A	13A	13A	15	15	15	16	-	-	-	-	-	-
4	492	14	5	12-1/2 (317)	7-3/8 (187)	18-3/8 (466)	13-1/2 (342)	7-3/8 (187)	33-3/16 (842)	10 (254)	14 (355)	3/4	BASE	-	12	12	12	13A	13A	13A	13A	13A	13A	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4	492	18	5	14-3/4 (374)	9-1/2 (241)	18-3/8 (466)	14 (355)	9-1/2 (241)	33-1/4 (844)	11 (279)	14 (355)	3/4	BASE	-	-	-	-	-	-	-	13A	13A	13A	13A	14A	14A	16	16	-	-	-	-	-	-	-	-	-
5	492	10	8	16 (406)	8 (203)	20 (508)	12-1/2 (317)	7 (178)	35-1/2 (902)	11 (279)	13 (330)	1	BASE	12	12	15	15	15	15	15	15	15	15	15	15	15	15	16	16	16	16	16	16	16	-	-	-
5	492	18	6	16 (406)	10 (254)	21 (533)	14 (355)	10 (254)	37-1/8 (942)	11 (279)	14 (355)	1	BASE	-	-	-	-	-	-	-	-	15	15	15	15	16	16	16	16	16	16	-	-	-	-	-	-
6	492	10	10	18 (457)	9 (228)	20-5/8 (523)	13 (330)	7-1/2 (190)	36-3/4 (933)	11 (279)	15 (381)	1	BASE	-	-	-	-	-	-	-	-	-	-	-	-	-	16	16	16	16	16	16	16	16	16	-	-
6	492	15	8	15-1/2 (394)	8-3/4 (222)	22-1/2 (571)	15 (381)	8-3/4 (222)	40-1/4 (1022)	13 (330)	15-1/2 (394)	1	BASE	-	-	-	-	15	15	16	16	16	16	16	16	16	16	16	16	-	-	-	-	-	-	-	-
8	492	15	10	17-1/2 (444)	9-1/4 (234)	22-1/2 (571)	17 (431)	9-1/4 (234)	40-1/4 (1022)	13 (330)	17 (431)	1	BASE	-	-	-	-	-	-	-	-	16	16	16	16	16	16	16	16	16	16	16	-	-	-	-	-
10	492	18	12	21-3/4 (552)	11-1/2 (292)	25-9/16 (649)	21 (533)	11-1/2 (292)	45-13/16 (1163)	15 (381)	21 (533)	1	BASE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	23	23	24	24

BASE	HA	HB	HE	HG	HH	HF	HP
11	18 (457)	48 (1219)	15 (381)	4 (101)	5/8 (15)	46 (1168)	1 (25)
12	18 (457)	54 (1371)	15 (381)	4 (101)	5/8 (15)	52 (1320)	1 (25)
13A	18 (457)	60 (1524)	15 (381)	4 (101)	5/8 (15)	58 (1473)	1 (25)
14A	18 (457)	65 (1651)	15 (381)	4 (101)	5/8 (15)	63 (1600)	1 (25)
15	22 (558)	60 (1524)	19 (482)	4 (101)	5/8 (15)	58 (1473)	1 (25)
16	22 (558)	72 (1828)	19 (482)	4 (101)	5/8 (15)	70 (1778)	1 (25)
17	22 (558)	84 (2133)	19 (482)	4 (101)	5/8 (15)	82 (2082)	1 (25)
23	26 (660)	84 (2133)	23 (584)	4-1/2 (114)	5/8 (15)	82 (2082)	1 (25)
24	26 (660)	96 (2438)	23 (584)	4-1/2 (114)	5/8 (15)	94 (2387)	1 (25)


NOTES


1. All dimensions are in inches.
2. Dimensions may vary ± 3/8".
3. Not for construction purposes unless certified.
4. Coupling gap may vary 1/8" thru 3".
5. Conduit box is shown in approximate location. Dimensions are not specifed as they vary with each motor manufacturer.
6. Suction and discharge flanges are ANSI standard flat face.
7. Structural steel bases are used for pumps with motor frames larger than 449T (refer to factory).

MODEL 495 ON STANDARD STEEL BASE

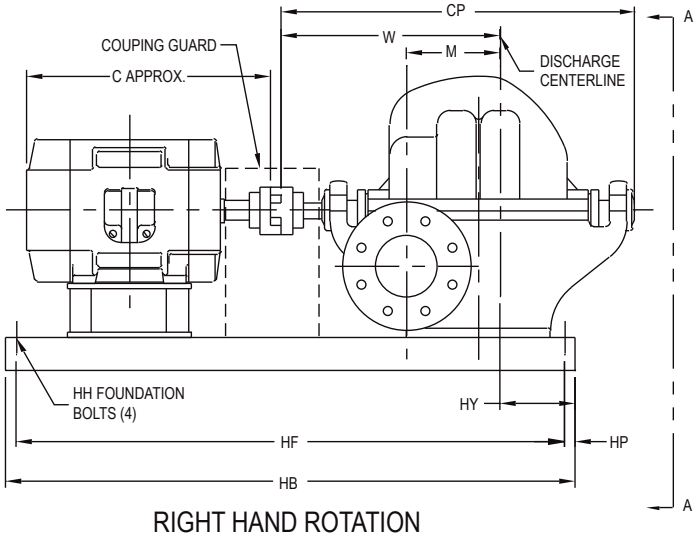


RIGHT HAND ROTATION

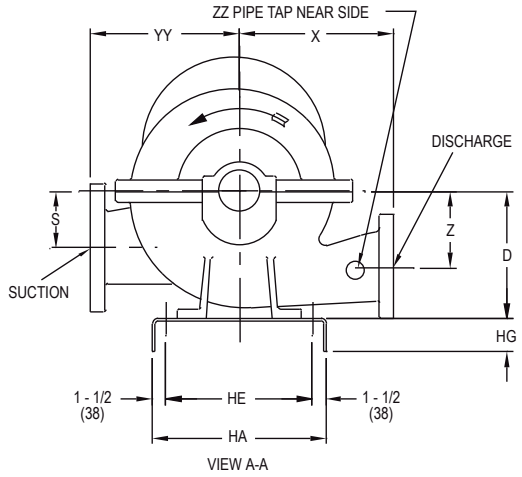

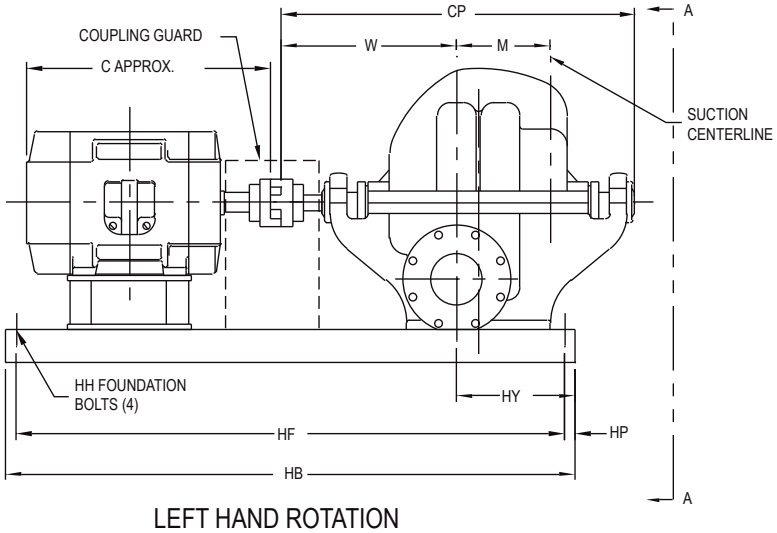

LEFT HAND ROTATION

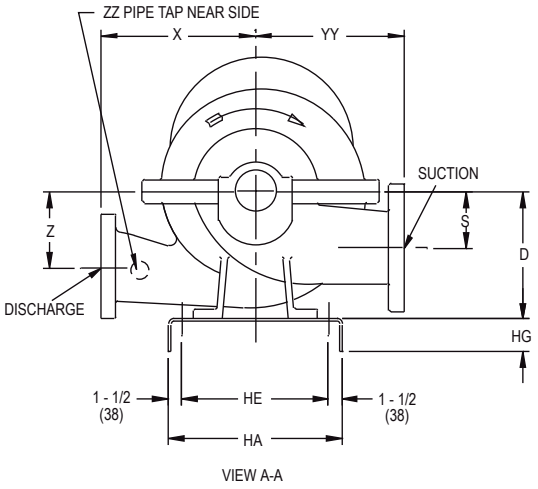


STANDARD 125# SUCTION FLANGE, 250# DISCHARGE FLANGE																MOTOR FRAME	404TS	404T	405TS	405T	444TS	444T	445TS	445T	447TS	447T	449TS	449T
PUMP SIZE			SUCTION	D	M	S	RIGHT HAND W	LEFT HAND W	X	Z	CP	RIGHT HAND HY	LEFT HAND HY	YY	ZZ	C APPROX	30 (762)	33 (838)	32 (812)	35 (889)	34 (863)	38 (965)	36 (914)	40 (1016)	40 (1016)	44 (1117)	45 (1143)	49 (1244)
DISCH	MODEL	CASE BORE																									
5	495	15	6	17 (431)	11 (279)	9 (228)	28-3/8 (720)	23-3/8 (593)	15 (381)	9 (228)	46-7/8 (1190)	13-1/2 (342)	18-1/2 (469)	15 (381)	1 (25)	BASE	17	17	17	17	-	-	-	-	-	-	-	-
6	495	17	8	17-1/2 (444)	13 (330)	9 (228)	31-5/8 (803)	25-1/8 (638)	16-1/2 (419)	10-1/2 (266)	52-1/2 (1333)	12-3/4 (323)	19-1/4 (488)	16-1/2 (419)	1 (25)	BASE	-	-	-	-	23	23	23	23	24	24	24	24

NOTES

1. All dimensions are in inches.
2. Dimensions may vary ± 3/8".
3. Not for construction purposes unless certified.
4. Coupling gap may vary 1/8" thru 3".
5. Conduit box is shown in approximate location. Dimensions are not specifed as they vary with each motor manufacturer.
6. Suction and discharge flanges are ANSI standard flat face.

BASE	HA	HB	HE	HG	HH	HF	HP
17	22 (558)	84 (2133)	19 (482)	4 (101)	5/8 (15)	82 (2082)	1 (25)
23	26 (660)	84 (2133)	23 (584)	4-1/2 (114)	5/8 (15)	82 (2082)	1 (25)
24	26 (660)	96 (2438)	23 (584)	4-1/2 (114)	5/8 (15)	94 (2387)	1 (25)

MODEL 481 ON STEEL DRIP RIM BASE

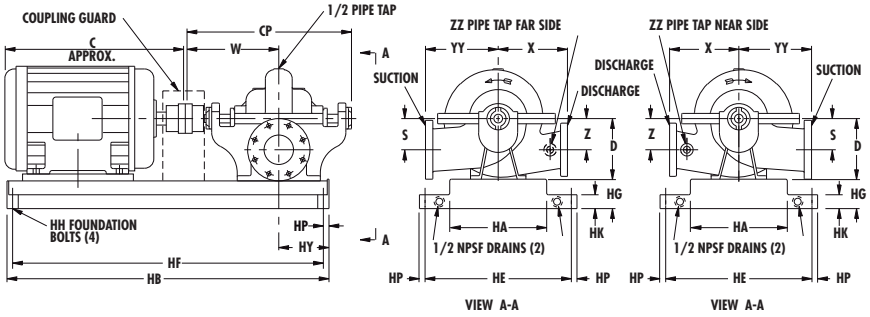

BASE	SIZE	HA	HB	HE	HF	HG	HH	HK	HP
5	11x36	11 (279)	36-1/2 (926)	15-7/8 (403)	35-1/8 (891)	3 (76)	1/2 (13)	1-1/2 (38)	11/16 (17)
6	11x42	11 (279)	42-1/2 (1079)	15-7/8 (403)	41-1/8 (1044)	3 (76)	1/2 (13)	1-1/2 (38)	11/16 (17)
8	14x42	14 (355)	42-1/2 (1079)	19 (482)	41 (1041)	3 (76)	5/8 (16)	1-1/2 (38)	3/4 (19)
9	14x48	14 (355)	48-1/2 (1231)	19 (482)	47 (1193)	3 (76)	5/8 (16)	1-1/2 (38)	3/4 (19)
11	18x46	18 (457)	46-1/2 (1180)	25-1/8 (638)	44-7/8 (1139)	4 (102)	3/4 (19)	2 (51)	13/16(21)
12	18x54	18 (457)	54-1/2 (1383)	25-1/8 (638)	52-7/8 (1342)	4 (102)	3/4 (19)	2 (51)	13/16 (21)
13	18x64	18 (457)	64-1/2 (1637)	25-1/8 (638)	62-7/8 (1593)	4 (102)	3/4 (19)	2 (51)	13/16 (21)
15	22x54	22 (558)	54-1/2 (1383)	29-1/8 (739)	52-7/8 (1342)	4-1/2 (114)	3/4 (19)	2 (51)	13/16 (21)
16	22x64	22 (558)	64-1/2 (1637)	29-1/8 (739)	62-7/8 (1593)	4-1/2 (114)	3/4 (19)	2 (51)	13/16 (21)
17	22x74	22 (558)	74-1/2 (1891)	29-1/8 (739)	72-7/8 (1850)	4-1/2 (114)	3/4 (19)	2 (51)	13/16 (21)
18	22x82	22 (558)	82-1/2 (2094)	29-1/8 (739)	80-7/8 (2053)	4-1/2 (114)	3/4 (19)	2 (51)	13/16 (21)

STANDARD 125# SUCTION AND DISCHARGE FLANGES | **OPTIONAL 125# SUCTION FLANGE, 250# DISCHARGE FLANGE** | **OPTIONAL 250# SUCTION AND DISCAHRGE FLANGES**


PUMP SIZE			SUCTION	POWER SERIES	D	S	W	X	Z	CP	HY	YY	ZZ	C APPROX	MOTOR FRAME	215T	254T	256T	284TS	284T	286TS	286T	324TS	324T	326TS	326T	364TS	364T	365TS	365T	404TS	404T	405TS	405T	444TS	444T	445TS	445T	447TS	447T	449TS	449T
DISCH	MODEL	CASE BORE															18	21	23	22	24	24	25	25	26	26	28	29	29	28	30	30	33	32	35	34	38	36	40	40	44	45	49
																	(305)	(330)	(355)	(406)	(457)	(533)	(584)	(558)	(609)	(609)	(635)	(635)	(660)	(660)	(711)	(685)	(736)	(711)	(761)	(761)	(838)	(787)	(863)	(914) 43·	(914)	(1143)	(1245)
2-1/2	481	10B	3	2	8+ (203)	4 (102)	13-1/2 (343)	9-3/4 (247)	4 (102)	24 (609)	5 1/2 (127)	10 (254)	1-1/4	BASE		5	8	8	9	9	9	9	11	12	11	12	12	12	12	12	-	-	-	-	-	-	-	-				
3	481	10	4		9* (228)	4-1/2 (114)	13-1/2 (343)	10 (254)	4-1/2 (114)	24 (609)	5-1/2 (140)	11 (279)		BASE		5	8	8	9	9	9	9	11	12	11	12	12	12	12	12	-	-	-	-	-	-	-	-				
4	481	11A 11C	5	3	10 (254)	5 (127)	14-1/2 (368)	12 (305)	5 (124)	26 (660)	6-1/2 (165)	12-3/4 (324)		BASE		8	8	9	9	9	11	11	12	12	12	12	12	12	12	12	15	15	15	15	16	16	-	-				
4	481	11D	5		11 (279)	5-1/2 (140)	14-1/2 -368	13 (330)	5-1/2 (140)	26 (660)	6-1/2 (165)	12-3/4 (324)		BASE		8	8	9	9	9	11	11	12	12	12	12	12	12	12	12	15	15	15	15	16	16	-	-				
4	481	15	6		11 (279)	5-1/2 (140)	14-1/2 (368)	13 (330)	5-1/2 (140)	26 (660)	6-1/2 (165)	14 (355)		BASE		-	8	9	9	9	11	11	12	12	12	12	12	12	12	12	15	15	15	15	-	-	-	-				
5	481	11B 11C	6	4	11** (279)	5-1/22 (140)	16 (406)	11-1/4 (286)	5-1/2 (140)	28-1/2 (723)	6 (152)	13-1/4 (336)		BASE		6	9	9	11	11	11	11	12	12	12	12	12	12	12	12	15	15	15	16	16	16	16	16	17	17		
5	481	15 15A	6		12-1/2 (217)	6-1/4 (159)	16 (406)	13-1/4 (336)	6-1/4 (159)	28-1/2 (723)	6-1/2 (165)	15 (381)		BASE		6	9	9	11	11	11	11	12	12	12	12	12	12	12	12	15	15	15	16	16	16	16	16	17	17	17	17
5	481	17	6		12-1/2 (217)	6-1/4 (159)	16 (406)	14 (355)	6-1/4 (159)	28-1/2 (723)	6-1/2 (165)	15 (381)		BASE		6	9	9	11	11	11	11	12	12	12	12	12	12	12	12	15	15	15	16	16	16	16	16	17			
6	481	11	8		12-1/2 (217)	6-1/2 (159)	16 (406)	11-3/4 (298)	6-1/4 (159)	28-1/2 (723)	6 (152)	14-1/2 (368)		BASE		6	9	9	11	11	11	11	12	12	12	12	12	12	12	12	15	15	15	16	16	16	16	16	17			
6	481	11HH	8	4A	16-1/2 (419)	8/5/08 (219)	18-1/2 (460)	10 (254)	8-5/8 (219)	32-7/8 (835)	8 (203)	15 (381)		BASE																15	**16**	16	**16**	16	**16**	16	**16**	16	**17**	**17**	**17**	**17**	**18**
6	481	14HH	8	5A	16-1/2 (419)	7-1/2 (191)	20-1/2 (519)	15 (381)	7-1/2 (191)	36-3/4 (933)	8 (203)	17 (431)		BASE															16	**16**	16	**16**	16	**16**	16	**17**	16	**17**	17	**17**	**18**	**18**
6	481	15B 15C	8		13-1/2 (343)	6-3/4 (171)	18 (457)	14-1/4 (368)	6-3/4 (171)	32 (812)	7-1/2 (190)	16-3/4 (425)		BASE			-	9	12	12	12	12	12	12	12	12	12	12	12	13	13	16	16	16	16	16	16	16	17	17				
6	481	18B 18C	8		14-3/4 (374)	8 (203	18 (457)	16 (406)	8 (203)	32 (812)	7-1/2 (190)	18 (457)		BASE			9	9	12	12	12	12	12	12	12	12	12	12	12	13	13	16	16	16	16	16	16	16	17	17				
6	481	20	8	5	14-3/4 (374)	8 (203)	18 (457)	15-3/4 (400)	8 (203)	32 (812)	7-1/2 (190)	18 (457)		BASE			9	9	12	12	12	12	12	12	12	12	12	12	12	13	13	16	16	16	16	16	16	16	17	17				
8	481	12	10		14-3/4 (374)	8 (203)	18 (457)	17 (431)	9 (228)	32 (812)	7-1/2 (190)	17-3/4 (450)		BASE			9	9	12	12	12	12	12	12	12	12	12	12	12	13	13	16	16	16	16	16	16	16	17	17				
8	481	17B	10		14-3/4 (374)	8 (203)	18 (457)	17 (431)	8 (203)	32 (812)	7-1/2 (190)	17-3/4 (450)	2	BASE			9	9	12	12	12	12	12	12	12	12	12	12	12	13	13	16	16	16	16	16	16	16	17	17				
8	481	21 21A	10	6B	18-1/2 (470)	9-1/2 (241)	21-7/8 (555)	18 (457)	9-1/2 (241)	38 (964)	11-1/2 (292)	21 (533)		BASE															13	13	13	17	17	17	17	17	17	17	18	18	18		
8	481	24	12	7	26 (660)	15 (381)	25-1/4 (641)	20 (508)	15 (381)	43-7/8 (1114)	11 (279)	25 (635)	1-1/4	BASE																										18	18	18	18
10	481	15	12	6B	25 (635)	13-1/2 (343)	21-7/8 (555)	17 (431)	13-1/2 (343)	38 (964)	11-1/2 (292)	20 (508)		BASE															13	13	13	17	17	17	17	17	17	17	18	18	18		
10	481	18	12		25 (635)	13-1/2 (343)	21-7/8 (555)	18 (457)	13-1/2 (343)	38 (964)	11-1/2 (292)	22 (558)	2	BASE																13	13	17	17	17	17	17	17	18	18	18			
10	481	18D	12	7A	25 (635)	12-1/4 (311)	24-1/4 (616)	20 (508)	12-1/4 (311)	43 (1092)	11-1/2 (292)	24 (610)		BASE																	16		17		17		18				
12	481	18A	14	7	24 (609)	15 (381	25-1/4 (615)	18 (457)	15 (381)	44 (1117)	11-1/2 (292)	23 (584)		BASE																	17	17	17	17	17	18	18	18	18	18			

NOTES
1. All dimensions are in inches (mm).
2. Dimensions may vary ± 3/8" (10).
3. Not for construction purposes unless certified.
4. Coupling gap may vary 1/8" (3) thru 1" (25).
5. Conduit box is shown in approximate location. Dimensions are not specifed as they vary with each motor manufacturer.
6. Suction and discharge flanges are ANSI standard flat face.
7. Three grout holes are provided in top of base.

\+ D is 9" (228) when using frames 364TS-365TS.
* D is 10-1/2" (266) when using frames 324TS-365TS.


** D is 12" (305) when using frames 404TS-445TS.
*** Pump sizes 6-481-11HH & 6-481-14HH are furnished as standard with 125# suction flange and 250# discharge flange.

MODEL 485 ON STEEL DRIP RIM BASE

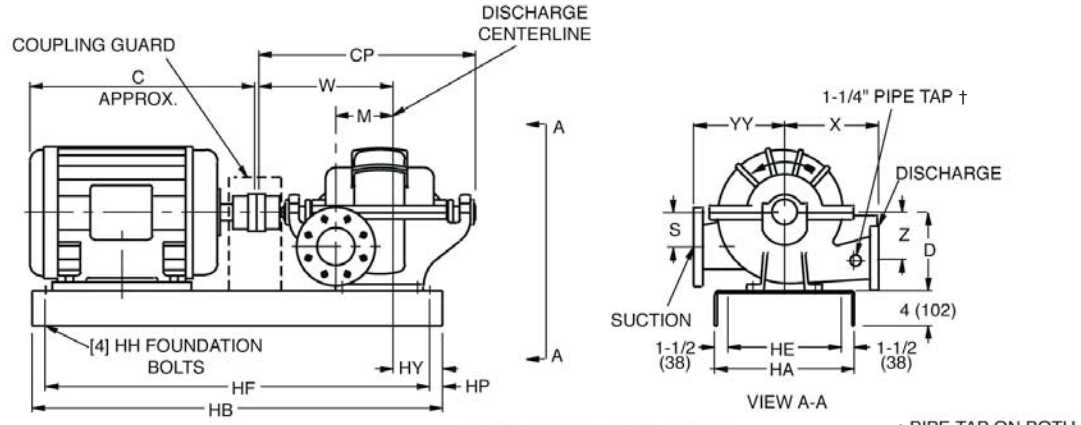

RIGHT HAND ROTATION

† PIPE TAP ON BOTH SIDES OF 5-485-12 AND 6-485-12. PIPE TAP ON NEAR SIDE OF OTHER PUMPS.

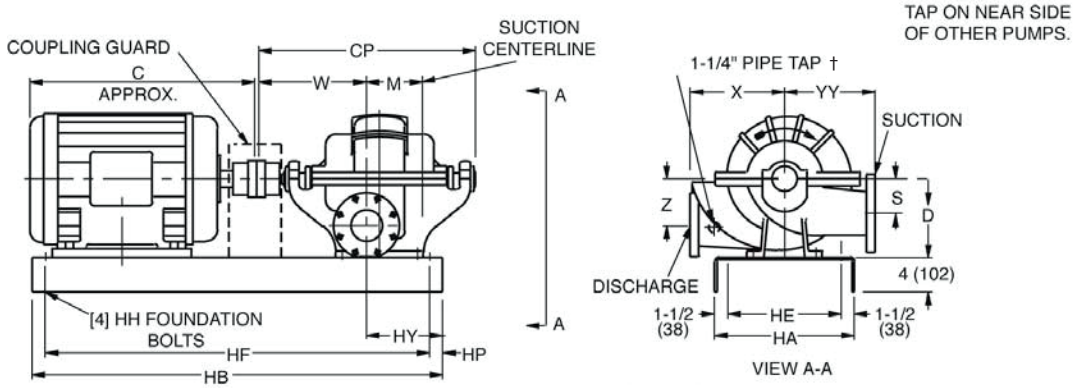

LEFT HAND ROTATION

☐ STANDARD* 125# SUCTION AND 250# DISCHARGE FLANGE ☐ OPTIONAL* 250# SUCTION AND DISCHARGE FLANGES

PUMP SIZE		CASE BORE	SUCTION	POWER SERIES	D	M	S	RIGHT HAND ROTATION W	LEFT HAND ROTATION W	X	Z	CP	RIGHT HAND ROTATION HY	LEFT HAND ROTATION HY	YY	MOTOR FRAME	326TS	326T	364TS	364T	365TS	365T	404TS	404T	405TS	405T	444TS	445TS	447TS	449TS
DISCH	MODEL															C	26 (660)	27 (711)	28 (685)	30 (736)	33 (711)	32 (761)	36 (761)	34 (838)	36 (812)	39 (914)	45 (863)	(914)	(991)	(1143)
4	485	15	5	3	11 (279)	7-1/8 (181)	5 (127)	18-7/8 (479)	15-1/8 (384)	13 (330)	6-1/2 (165)	31 (787)	4-1/8 (105)	7-7/8 (200)	13-1/2 (343)	BASE	12	12	12	12	12	12	15	15	15	15	15			
5	485	12	5	4A	14 (356)	6-5/8 (168)	7 (178)	20-7/8 (530)	18-1/8 (460)	13 (330)	7 (178)	35-3/8 (889)	11-1/8 (283)	13-7/8 (352)	13 (330)	BASE							16		16		16	16	17	17
5	485	15	6	4	12-1/2 (317)	9-1/8 (232)	5-1/2 (140)	21-1/8 (536)	16-7/8 (428)	15 (381)	7-1/2 (190)	34-1/2 (876)	4-7/8 (124)	9-1/8 (232)	15-7/16 (392)	BASE	12	12	12	12	12	13	15	15	15	15	15	16		
6	485	12	6	5A	15 (381)	7-1/2 (191)	8 (203)	22-7/8 (581)	19-5/8 (498)	14 (356)	8 (203)	38-1/2 (978)	10-7/8 (276)	14-1/8 (359)	14 (356)	BASE									16		16	16	17	17
6	485	16/ 16B	8	5	16.5 (419)	10.5 (267)	8.25 (210)	23.63 (600)	18.38 (467)	19 (483)	7.75 (197)	37.88 (962)	5 (127)	10.25 (260)	17 (432)	BASE					13	13	16	16	16	16	16	16	16	17
6	485	17A	8	5	14-3/4 (374)	11 (279)	7 (178)	24-1/2 (622)	17-1/2 (444)	16 (406)	9 (228)	38 (964)	3-1/2 (89)	10-1/2 (266)	16-1/2 (419)	BASE	13	13	13	13	13	13	15	15	15	16	16	16		


BASE	SIZE	HA	HB	HE	HF	HH	HP
12	18x54 (558)	18 (457)	54 (1372)	15 (381)	52 (1321)	5/8 (16)	1 (25)
13	18x60 (660)	18 (457)	60 (1524)	15 (381)	35 (889)	5/8 (16)	24 (609)
15	22x60 (660)	22 (559)	60 (1524)	19 (483)	58 (1473)	3/4 (19)	1 (25)
16	22x72 (660)	22 (559)	72 (1829)	19 (483)	70 (1777)	5/8 (16)	1 (25)
17	22x84 (660)	22 (559)	84 (2134)	19 (483)	80 (2083)	5/8 (16)	1 (25)

NOTES

1. All dimensions are in inches (mm).
2. Dimensions may vary ± 3/8" (10).
3. Not for construction purposes unless certified.
4. Coupling gap may vary 1/8" thru 1".
5. Conduit box is shown in approximate location. Dimensions are not specifed as they vary with each motor manufacturer.
6. Suction and discharge flanges are ANSI standard flat face.

* 150# AND 300# OR 300# AND 300# SUCTION AND DISCHARGE DUCTILE IRON FOR 5-485-12 AND 6-485-12

MODEL 491 ON STEEL DRIP RIM BASE

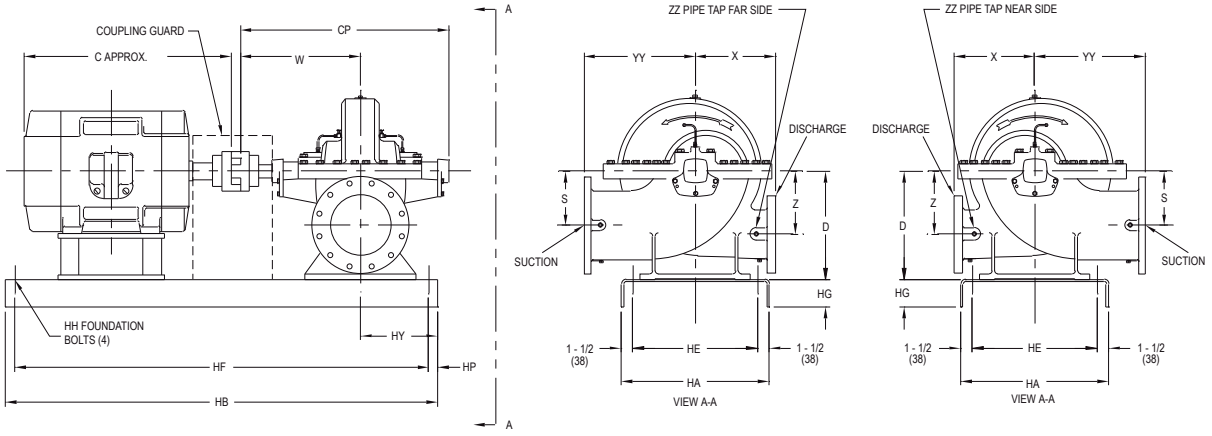

RIGHT HAND ROTATION

LEFT HAND ROTATION

STANDARD* 125# SUCTION AND DISCHARGE FLANGES	OPTIONAL 125# SUCTION FLANGE, 250# DISCHARGE FLANGE	OPTIONAL 250# SUCTION AND DISCHARGE FLANGES

PUMP SIZE													MOTOR FRAME	254T	256T	284TS	284T	286TS	286T	324TS	324T	326TS	326T	364TS	364T	365TS	365T	404TS	404T	405TS	405T	444TS	444T	445TS	445T	447TS	447T	449TS	449T
DISCH	MODEL	CASE BORE	SUCTION	D	S	W	X	Z	CP	HY	YY	ZZ	C APPROX.	21 (533)	23 (584)	22 (558)	24 (609)	24 (609)	25 (635)	25 (635)	26 (660)	28 (711)	29 (736)	29 (736)	28 (711)	30 (762)	30 (762)	33 (838)	32 (812)	35 (889)	34 (863)	38 (965)	36 (914)	40 (1016)	44 (1117)	45 (1143)	49 (1244)
3	491	9A&C	5	12 (304)	6-1/8 (155)	14-5/8 (371)	11 (279)	6-1/8 (155)	25-15/16 (658)	10 (254)	12 (304)	3/4	BASE	11	11	11	12	12	12	12	12	12	12	12	12	12	-	-	-	-	-	-	-	-	-	-
4	491	8A	6	11 (279)	5-3/4 (146)	14-5/8 (371)	10 (254)	5-1/2 (140)	25-15/16 (698)	8 (203)	11-1/4 (286)	3/4	BASE	11	11	11	11	11	11	12	12	12	12	12	12	12	-	-	-	-	-	-	-	-	-	-
4	491	11A&C	6	13-3/4 (349)	6-7/8 (174)	16-5/8 (422)	11-1/4 (285)	7-1/8 (180)	29-11/16 (754)	10 (254)	14 (355)	3/4	BASE	12	12	12	12	12	12	12	12	12	13A	13A	13A	13A	15	15	15	16	16	16	16	-	-	-	-
4	491	14C	6	13-3/4 (349)	6-7/8 (174)	17-5/8 (447)	13 (330)	8-3/8 (212)	31-11/16 (804)	12 (304)	15-1/4 (387)	3/4	BASE	-	-	-	-	-	15	15	15	15	15	15	15	15	-	-	-	-	-	-	-	-	-	-
5	491	14A	8	16-1/4 (412)	8-1/4 (209)	17-5/8 (447)	13-1/2 (342)	9-3/4 (247)	31-11/16 (804)	12 (304)	17-1/4 (438)	1	BASE	-	-	-	-	15	15	15	15	15	15	15	15	15	16	16	16	16	-	-	-	-	-	-	-
5	491	18A	8	16-1/4 (412)	8-1/8 (206)	18-7/8 (479)	15 (381)	10-5/8 (269)	33-3/8 (847)	12 (304)	18-3/4 (476)	1	BASE	-	-	-	-	-	-	-	-	-	15	15	15	15	16	16	16	16	16	16	16	-	-	-	-
6	491	12A	6	13-3/4 (349)	6-7/8 (174)	16-5/8 (422)	20-1/2 (520)	7-1/8 (180)	29-11/16 (754)	10 (254)	14 (355)	1	BASE	12	12	12	12	12	12	12	12	12	13A	13A	13A	13A	15	15	15	16	16	16	-	-	-	-	-
6	491	14A&C	10	18-3/4 (476)	9-3/8 (238)	20-1/8 (511)	13-1/4 (336)	10 (254)	35-7/8 (911)	12 (304)	18 (457)	1	BASE	-	15	15	15	15	15	15	15	15	15	16	16	16	16	16	16	16	16	16	-	-	-	-	-
6	491	18C	10	18-3/4 (476)	9-3/8 (238)	20-1/8 (511)	16 (406)	11-3/4 (298)	35-7/8 (911)	13-1/2 (342)	20 (508)	1	BASE	-	-	-	-	21	21	21	21	21	21	21	21	21	21	22	22	22	22	22	22	22	22	23	23
6	491	19A	10	18-3/4 (476)	9-3/8 (238)	22-5/8 (574)	18 (457)	12-1/8 (307)	39-1/4 (996)	13-1/2 (342)	22 (558)	1	BASE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	22	22	22	22	23	23
8	491	14A	12	21-1/2 (546)	10-3/4 (273)	20-1/2 (520)	16 (406)	10-3/4 (273)	36-5/8 (930)	13-1/2 (342)	22 (558)	1	BASE	-	-	-	-	-	-	-	-	-	-	-	-	-	22	22	22	22	22	22	22	-	-	-	-
8	491	18A	12	21-1/2 (546)	10-3/4 (273)	23-3/4 (603)	16 (406)	12-1/2 (317)	41-1/2 (1054)	13-1/2 (342)	22 (558)	1	BASE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	22	22	22	22	22	22	23	23	23	23
10	491	20	16	24 (609)	13 (330)	25-9/16 (649)	23 (584)	14-1/4 (361)	44-9/16 (1131)	15 (381)	25 (635)	1	BASE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	23	23	24	24


NOTES

1. All dimensions are in inches.
2. Dimensions may vary ± 3/8".
3. Not for construction purposes unless certified.
4. Coupling gap may vary 1/8" thru 3".
5. Conduit box is shown in approximate location. Dimensions are not specifed as they vary with each motor manufacturer.
6. Suction and discharge flanges are ANSI standard flat face.
7. Structural steel bases are used for pumps with motor frames larger than 449T (refer to factory).

*STD 125# SUCTION FLANGE AND 250# DISCHARGE FLANGE FOR 6-491-12A AND 10-491-20

BASE	HA	HB	HE	HG	HH	HF	HP
11	18 (457)	48 (1219)	15 (381)	4 (101)	5/8 (15)	46 (1168)	1 (25)
12	18 (457)	54 (1371)	15 (381)	4 (101)	5/8 (15)	52 (1320)	1 (25)
13A	18 (457)	60 (1524)	15 (381)	4 (101)	5/8 (15)	58 (1473)	1 (25)
14A	18 (457)	65 (1651)	15 (381)	4 (101)	5/8 (15)	63 (1600)	1 (25)
15	22 (558)	60 (1524)	19 (482)	4 (101)	5/8 (15)	58 (1473)	1 (25)
16	22 (558)	72 (1828)	19 (482)	4 (101)	5/8 (15)	70 (1778)	1 (25)
21	24 (609)	66 (1676)	21 (533)	4 (101)	5/8 (15)	64 (1625)	1 (25)
22	24 (609)	78 (1981)	21 (533)	4 (101)	5/8 (15)	76 (1930)	1 (25)
23	26 (660)	84 (2133)	23 (584)	4-1/2 (114)	5/8 (15)	82 (2082)	1 (25)
24	26 (660)	96 (2438)	23 (584)	4-1/2 (114)	5/8 (15)	94 (2387)	1 (25)

MODEL 492 ON STEEL DRIP RIM BASE

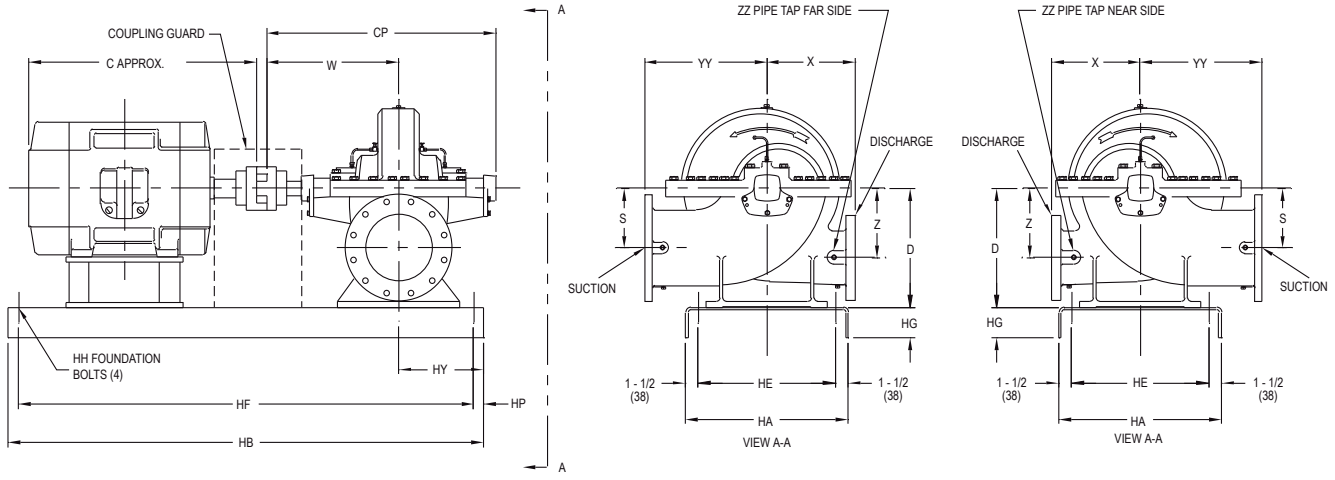

RIGHT HAND ROTATION

LEFT HAND ROTATION

STANDARD 125# SUCTION AND DISCHARGE FLANGES	OPTIONAL 125# SUCTION FLANGE, 250# DISCHARGE FLANGE	OPTIONAL 250# SUCTION AND DISCHARGE FLANGES


PUMP SIZE														MOTOR FRAME	254T	256T	284TS	284T	286TS	286T	324TS	324T	326TS	326T	364TS	364T	365TS	365T	404TS	404T	405TS	405T	444TS	444T	445TS	445T	447TS	447T	449TS	449T
DISCH	MODEL	CASE BORE	SUCTION	D	S	W	X	Z	CP	HY	YY	ZZ	C APPROX	21 (533)	23 (584)	22 (558)	24 (609)	24 (609)	25 (635)	25 (635)	26 (660)	26 (660)	28 (711)	29 (736)	29 (736)	28 (711)	30 (762)	30 (762)	33 (838)	32 (812)	35 (889)	34 (863)	38 (965)	36 (914)	40 (1016)	40 (1016)	44 (1117)	45 (1143)	49 (1244)
3	492	10A	4	10-1/2 (267)	5-1/2 (140)	16-1/2 (419)	10 (254)	5-1/2 (140)	29-3/16 (757)	7 (178)	10 (254)	1	BASE	11	11	11	11	11	11	12	12	12	12	12	12	12	12	-	-	-	-	-	-	-	-	-	-	-
4	492	10	6	13 (330)	6-1/2 (165)	16-7/8 (428)	10-1/4 (260)	6-1/2 (165)	29-13/16 (757)	10 (254)	11 (279)	3/4	BASE	-	-	-	-	-	-	13A	13A	13A	13A	13A	13A	13A	13A	15	15	15	16	-	-	-	-	-	-	-
4	492	14	5	12-1/2 (317)	7-3/8 (187)	18-3/8 (466)	13-1/2 (342)	7-3/8 (187)	33-3/16 (842)	10 (254)	14 (355)	3/4	BASE	-	12	12	12	13A	13A	13A	13A	13A	13A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
4	492	18	5	14-3/4 (374)	9-1/2 (241)	18-3/8 (466)	14 (355)	9-1/2 (241)	33-1/4 (844)	11 (279)	14 (355)	3/4	BASE	-	-	-	-	-	-	-	-	13A	13A	13A	13A	14A	14A	16	16	-	-	-	-	-	-	-	-	-
5	492	10	8	16 (406)	8 (203)	20 (508)	12-1/2 (317)	7 (178)	35-1/2 (902)	11 (279)	13 (330)	1	BASE	12	12	15	15	15	15	15	15	15	15	15	15	15	15	16	16	16	16	16	16	16	16	-	-	-
5	492	18	6	16 (406)	10 (254)	21 (533)	14 (355)	10 (254)	37-1/8 (942)	11 (279)	14 (355)	1	BASE	-	-	-	-	-	-	-	-	15	15	15	15	16	16	16	16	16	16	-	-	-	-	-	-	-
6	492	10	10	18 (457)	9 (228)	20-5/8 (523)	13 (330)	7-1/2 (190)	36-3/4 (933)	11 (279)	15 (381)	1	BASE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	16	16	16	16	16	16	16	16	16	16	-
6	492	15	8	15-1/2 (394)	8-3/4 (222)	22-1/2 (571)	15 (381)	8-3/4 (222)	40-1/4 (1022)	13 (330)	15-1/2 (394)	1	BASE	-	-	-	-	15	15	16	16	16	16	16	16	16	16	16	16	16	16	-	-	-	-	-	-	-
8	492	15	10	17-1/2 (444)	9-1/4 (234)	22-1/2 (571)	17 (431)	9-1/4 (234)	40-1/4 (1022)	13 (330)	17 (431)	1	BASE	-	-	-	-	-	-	-	-	16	16	16	16	16	16	16	16	16	16	16	16	-	-	-	-	-	-
10	492	18	12	21-3/4 (552)	11-1/2 (292)	25-9/16 (649)	21 (533)	11-1/2 (292)	45-13/16 (1163)	15 (381)	21 (533)	1	BASE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	23	23	24	24

BASE	HA	HB	HE	HG	HH	HF	HP
11	18 (457)	48 (1219)	15 (381)	4 (101)	5/8 (15)	46 (1168)	1 (25)
12	18 (457)	54 (1371)	15 (381)	4 (101)	5/8 (15)	52 (1320)	1 (25)
13A	18 (457)	60 (1524)	15 (381)	4 (101)	5/8 (15)	58 (1473)	1 (25)
14A	18 (457)	65 (1651)	15 (381)	4 (101)	5/8 (15)	63 (1600)	1 (25)
15	22 (558)	60 (1524)	19 (482)	4 (101)	5/8 (15)	58 (1473)	1 (25)
16	22 (558)	72 (1828)	19 (482)	4 (101)	5/8 (15)	70 (1778)	1 (25)
17	22 (558)	84 (2133)	19 (482)	4 (101)	5/8 (15)	82 (2082)	1 (25)
23	26 (660)	84 (2133)	23 (584)	4-1/2 (114)	5/8 (15)	82 (2082)	1 (25)
24	26 (660)	96 (2438)	23 (584)	4-1/2 (114)	5/8 (15)	94 (2387)	1 (25)


NOTES


1. All dimensions are in inches.
2. Dimensions may vary ± 3/8".
3. Not for construction purposes unless certified.
4. Coupling gap may vary 1/8" thru 3".
5. Conduit box is shown in approximate location. Dimensions are not specifed as they vary with each motor manufacturer.
6. Suction and discharge flanges are ANSI standard flat face.
7. Structural steel bases are used for pumps with motor frames larger than 449T (refer to factory).

MODEL 495 ON STEEL DRIP RIM BASE

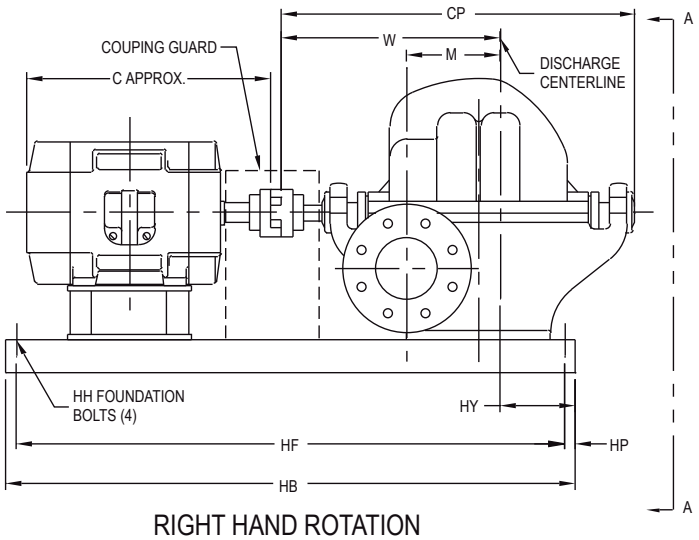


RIGHT HAND ROTATION

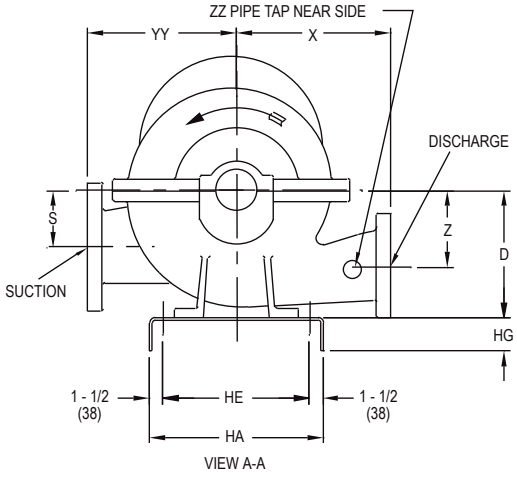

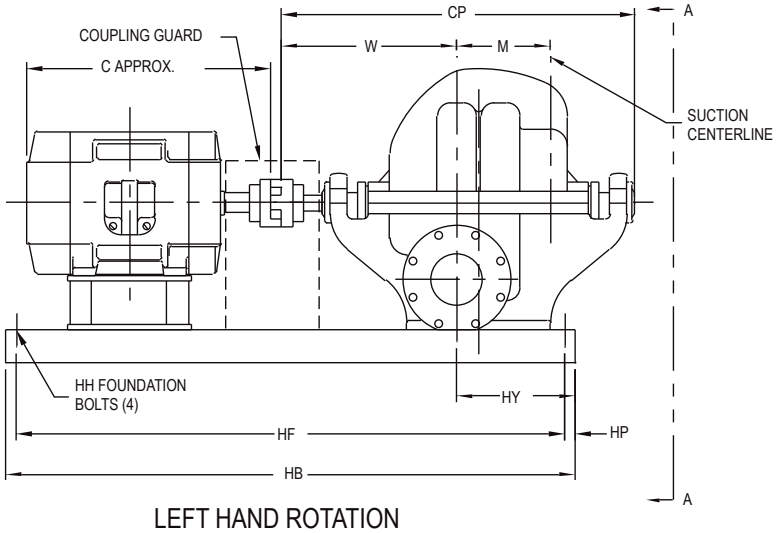

LEFT HAND ROTATION

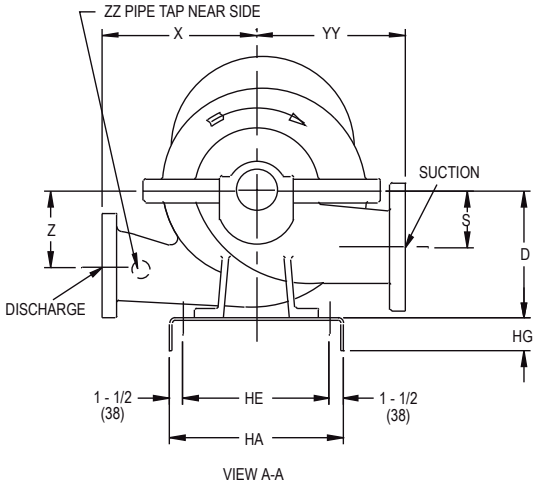

STANDARD
125# SUCTION FLANGE,
250# DISCHARGE FLANGE

OPTIONAL
250# SUCTION AND
DISCHARGE FLANGE

PUMP SIZE			SUCTION	D	M	S	RIGHT HAND W	LEFT HAND W	X	Z	CP	RIGHT HAND HY	LEFT HAND HY	YY	ZZ	C APPROX	MOTOR FRAME	404TS	404T	405TS	405T	444TS	444T	445TS	445T	447TS	447T	449TS	449T
DISCH	MODEL	CASE BORE																											
																	C APPROX	30 (762)	33 (838)	32 (812)	35 (889)	34 (863)	38 (965)	36 (914)	40 (1016)	40 (1016)	44 (1117)	45 (1143)	49 (1244)
5	495	15	6	17 (431)	11 (279)	9 (228)	28-3/8 (720)	23-3/8 (593)	15 (381)	9 (228)	46-7/8 (1190)	13-1/2 (342)	18-1/2 (469)	15 (381)	1 (25)	BASE	17	17	17	17	-	-	-	-	-	-	-	-
6	495	17	8	17-1/2 (444)	13 (330)	9 (228)	31-5/8 (803)	25-1/8 (638)	16-1/2 (419)	10-1/2 (266)	52-1/2 (1333)	12-3/4 (323)	19-1/4 (488)	16-1/2 (419)	1 (25)	BASE	-	-	-	-	23	23	23	23	24	24	24	24

NOTES
1. All dimensions are in inches.
2. Dimensions may vary ± 3/8".
3. Not for construction purposes unless certified.
4. Coupling gap may vary 1/8" thru 3".
5. Conduit box is shown in approximate location. Dimensions are not specifed as they vary with each motor manufacturer.
6. Suction and discharge flanges are ANSI standard flat face.

BASE	HA	HB	HE	HG	HH	HF	HP
17	22 (558)	84 (2133)	19 (482)	4 (101)	5/8 (15)	82 (2082)	1 (25)
23	26 (660)	84 (2133)	23 (584)	4-1/2 (114)	5/8 (15)	82 (2082)	1 (25)
24	26 (660)	96 (2438)	23 (584)	4-1/2 (114)	5/8 (15)	94 (2387)	1 (25)

PAGE INTENTIONALLY LEFT BLANK



800 Airport Road | North Aurora, Illinois 60542 | Ph: 630.859.7000 | pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

©2021 Pentair. All Rights Reserved.

AF-01-10-912-201-274 (08-15-2021)