MYERS® PQP Series
Centrifugal Pumps

Quick priming PQP Series Pumps feature lightweight construction in a self-priming design. These models offer a stronger pump body with reinforcement ribs and also a new 2" suction that is designed for the professional pump contractor.



APPLICATIONS

- **Turf sprinkling and water transfer...** for residential and light commercial

SPECIFICATIONS

Pump Body – Fiberglass-reinforced engineered composite

Base – High-impact composite

Seal Plate – Fiberglass-reinforced engineered composite

Impeller – Polycarbonate

Diffuser – Polycarbonate

Shaft – Stainless steel

Clamp – Stainless steel

FEATURES


- **1, 1-1/2, 2 and 2-1/2 HP**
- **Single Phase** – 115/230V dual voltage, 60 Hz; ODP
- **Fiberglass-reinforced Polypropylene Pump Body and Seal Plate** – Lightweight, corrosion-resistant and exceptionally strong
- **Drain Port** – Provided for easy winterization
- **Corrosion-resistant Composite Pump Base**
- **Easy Serviceable Back Pullout Design**
- **2-Compartment, Square Flange Motor, Thermal Overload Protected**
- **Rapid Priming** – Once pump body is filled with water

ORDERING INFORMATION

Catalog Number	HP	Pipe Tapping Sizes		Motor Voltage	Approx. Wt. Lbs.
		Suction	Discharge		
PQP10	1	1-1/2"	1-1/2"	115/230	38
PQP15	1-1/2	1-1/2"	1-1/2"	115/230	41
PQP20	2	2"	2"	230	52
PQP25	2-1/2	2"	2"	230	54

MYERS® PQP Series
Centrifugal Pumps

OUTLINE DIMENSIONS

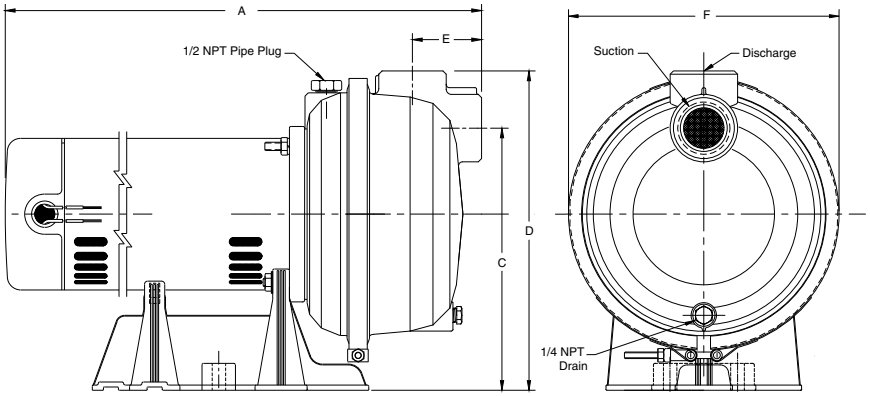


Cat. No.	A	C	D	E	F
PQP10	17.58	9.71	11.82	2.52	10.18
PQP15	18.46	9.71	11.82	2.52	10.18
PQP20	20.0	8.88	12.38	3.81	11.18
PQP25	20.5	8.88	12.38	3.81	11.18

Dimensions (in inches) are for estimating purposes only.

PUMP PERFORMANCE – CAPACITY IN GALLONS PER MINUTE

Disch. Press. PSI	PQP10					PQP15					PQP20					PQP25				
	Distance Above Water																			
	5'	10'	15'	20'	25'	5'	10'	15'	20'	25'	5'	10'	15'	20'	25'	5'	10'	15'	20'	25'
	Capacity – Gallons per Minute																			
10	53	52	50	48	46	67	66	64	61	59	70	69	67	64	62	90	88	86	82	80
20	45	42	39	37	35	59	56	54	50	47	61	59	56	53	50	79	76	72	70	65
30	35	31	27	24	18	48	44	40	37	32	50	48	44	41	37	66	62	57	55	50
40	17	10				31	26	20	10		36	33	25	23	19	50	45	42	37	32
50											16	9				30	23	20		

PUMP PERFORMANCE

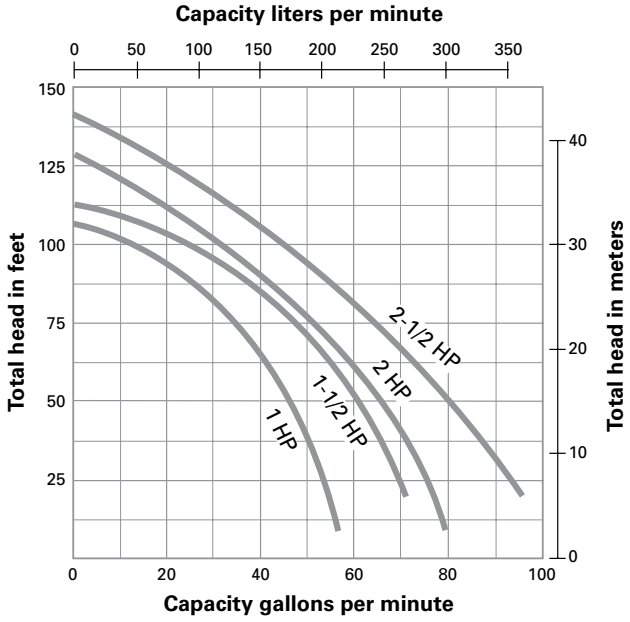

USA 293 WRIGHT STREET, DELAVAN, WI 53115 WWW.FEMYERS.COM PH: 888-987-8677 ORDERS FAX: 800-426-9446
CANADA 490 PINEBUSH ROAD, UNIT 4, CAMBRIDGE, ONTARIO, N1T 0A5 PH: 800-363-7867 ORDERS FAX: 888-606-5484

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

© 2014 Pentair Ltd. All Rights Reserved.